

26W

MX021 BIC 16 ▲ 136

△ 16° - 3000K - 2630 lm - CRI 80

MX022 BIC 16 ▲ 136

△ 16° - 3000K - 2150 lm - CRI 90

MX021 BIN 16

△ 16° - 4200K - 2780 lm - CRI 80

MX021 BIC 40 ▲ 137

△ 40° - 3000K - 2630 lm - CRI 80

MX022 BIC 40 ▲ 137

△ 40° - 3000K - 2150 lm - CRI 90

MX021 BIN 40

△ 40° - 4200K - 2780 lm - CRI 80

230V - 50Hz - 700 mA

IP20

Colori/Coloris/Colour: 01 - 02 - 18



40W

MX001 BIC 28 ▲ 130

△ 28° - 3000K - 4890 lm - CRI 80

MX002 BIC 28 ▲ 130

△ 28° - 3000K - 4000 lm - CRI 90

MX001 BIN 28

△ 28° - 4200K - 5160 lm - CRI 80

MX001 BIC 50 ▲ 131

△ 50° - 3000K - 4890 lm - CRI 80

MX002 BIC 50 ▲ 131

△ 50° - 3000K - 4000 lm - CRI 90

MX001 BIN 50

△ 50° - 4200K - 5160 lm - CRI 80

230V - 50Hz - 1400 mA

IP20

Colori/Coloris/Colour: 01 - 02 - 18



Accessori

658 Adattatore per fissaggio a soffitto - Colori: 01 - 02 - 18

659 Adattatore per installazione ad incasso - ø 105 mm - Colori: 01 - 02 - 18

Accessoires


658 Adaptateur pour fixation au plafond - Coloris: 01 - 02 - 18

659 Adaptateur pour adaptateur encastrable - ø 105 mm - Coloris: 01 - 02 - 18

Accessories

658 Adapter kit for ceiling installation - Colours: 01 - 02 - 18

659 Adapter kit for recessed adapter - ø 105 mm - Colours: 01 - 02 - 18

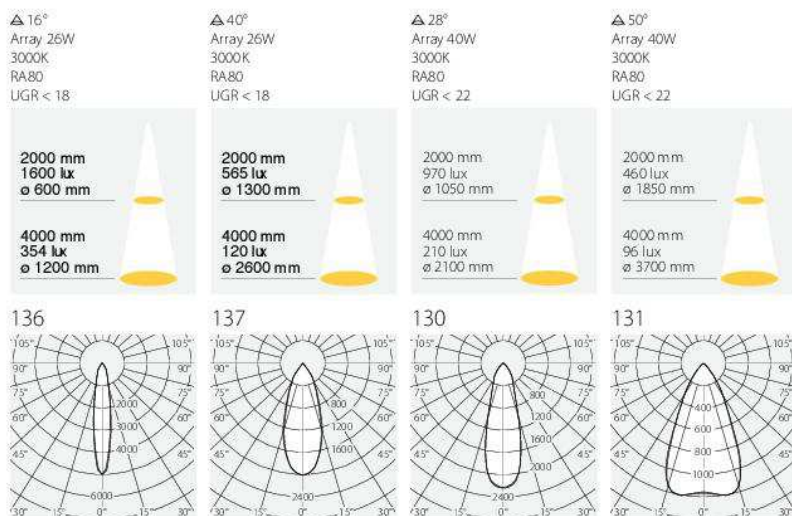

01 bianco - 02 nero - 18 grigio

01 blanc - 02 noir - 18 gris

01 white - 02 black - 18 grey

Dimensioni in mm / Dimensions en mm / Size (mm)