

15W

MM001 BIC 16 ▲ 132

△ 16° - 3000K - 1950 lm - CRI 80

MM002 BIC 16 ▲ 132

△ 16° - 3000K - 1600 lm - CRI 90

MM001 BIN 16

△ 16° - 4000K - 2060 lm - CRI 80

MM001 BIC 40 ▲ 133

△ 40° - 3000K - 1950 lm - CRI 80

MM002 BIC 40 ▲ 133

△ 40° - 3000K - 1600 lm - CRI 90

MM001 BIN 40

△ 40° - 4000K - 2060 lm - CRI 80

230V - 50Hz - 500 mA

IP20

Colori/Coloris/Colour: 01 - 02 - 18



26W

MM003 BIC 16 ▲ 136

△ 16° - 3000K - 2630 lm - CRI 80

MM004 BIC 16 ▲ 136

△ 16° - 3000K - 2150 lm - CRI 90

MM003 BIN 16

△ 16° - 4000K - 2780 lm - CRI 80

MM003 BIC 40 ▲ 137

△ 40° - 3000K - 2630 lm - CRI 80

MX004 BIC 40 ▲ 137

△ 40° - 3000K - 2150 lm - CRI 90

MM003 BIN 40

△ 40° - 4000K - 2780 lm - CRI 80

230V - 50Hz - 700 mA

IP20

Colori/Coloris/Colour: 01 - 02 - 18



Accessori

658 Adattatore per fissaggio a soffitto - Colori: 01 - 02 - 18

659 Adattatore per installazione ad incasso - ø 105 mm - Colori: 01 - 02 - 18

Accessoires


658 Adaptateur pour fixation au plafond - Coloris: 01 - 02 - 18

659 Adaptateur pour adaptateur encastrable - ø 105 mm - Coloris: 01 - 02 - 18

Accessories

658 Adapter kit for ceiling installation - Colours: 01 - 02 - 18

659 Adapter kit for recessed adapter - ø 105 mm - Colours: 01 - 02 - 18

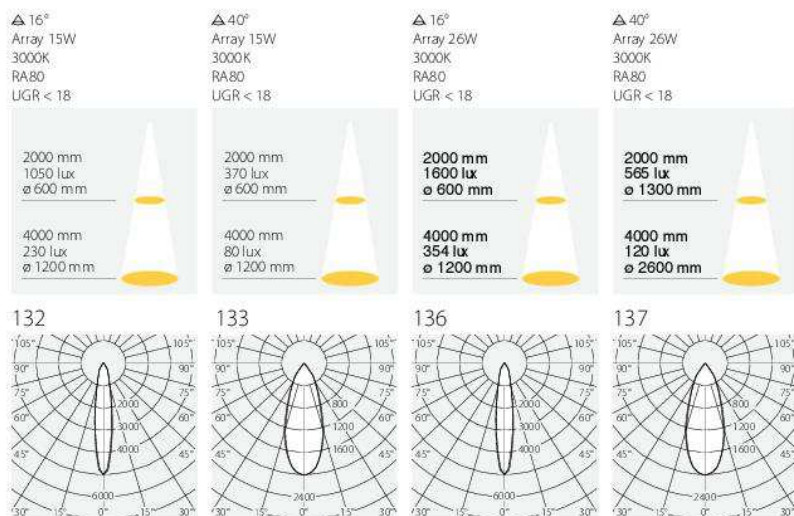

01 bianco - 02 nero - 18 grigio

01 blanc - 02 noir - 18 gris

01 white - 02 black - 18 grey

Dimensioni in mm / Dimensions en mm / Size (mm)