



Le dimensioni minime e gli effetti luminosi sono le maggiori caratteristiche di questa famiglia per utilizzo in interni ed esterni. Aqua è disponibile nella versione da 1 W nelle tonalità bianco caldo 3000K o bianco freddo 5500K con lenti da 15° o 40° o con vetro sabbiato bombato. Struttura in alluminio tornito anodizzato, disponibili modelli con grado di protezione IP44 per installazione con molle e IP67 completi di cassaforma. Alimentabile a 350, 500 e 700 mA, alimentatore escluso.

The minimal dimensions and the luminous effects are the main characteristics of this important LED recessed outdoor and indoor range. Aqua is available in 1W version, warm 3000K or cold 5500K white with 15° or 40° lenses or with round shaped opal glass. Body in turned anodized aluminum. Available with an IP44 for installation with springs and an IP67 completed with recessed housing. Powered 350, 500 and 700 mA. Driver excluded.

La taille minimale et les effets de lumière sont les principales caractéristiques de cette famille pour l'installation intérieur et extérieur. Aqua est disponible dans la version de 1W, teinte blanc chaud de 3000K ou blanc froid de 5500K, angle 15° ou 40° et avec le verre bombé et sablé. Structure en aluminium anodisé. Modèle disponible avec un degré de protection IP67, complète de boîtier d'encastrement, et IP44. Alimentation à 350, 500 et 700 mA. Driver exclu.



CE F IP44 III

05

LAA.5101.156







1 LEDx1,2W/2,4W 350/700mA

Versione vetro sabbiato, con LED bianco freddo 5500K.
Driver escluso.
Version with sanded glass, with cold white LED 5500K.
Driver excluded.
Version verre sablé, avec LED blanc froid 5500K.
Driver exclu.

LAA.5101.158

1 LEDx1,2W/2,4W 350/700mA

Versione vetro sabbiato, con LED bianco caldo 3000K.
Driver escluso.
Version with sanded glass, with warm white LED 3000K.
Driver excluded.
Version verre sablé, avec LED blanc chaud 3000K.
Driver exclu.



Driver forniti su richiesta come accessori.
Drivers offered on demand as accessories.
Driver fournis séparément comme accessoires.

CE F IP44 III

05

LAA.5101.256







1 LEDx1,2W/2,4W 350/700mA

Versione vetro trasparente, con LED bianco freddo 5500K, lente 40°. Driver escluso.
Version with transparent glass, with cold white LED 5500K, lenses 40°. Driver excluded.
Version verre transparent, avec LED blanc froid 5500K, lentille 40°. Driver exclu.



LAA.5101.258

1 LEDx1,2W/2,4W 350/700mA

Versione vetro trasparente, con LED bianco caldo 3000K, lente 40°. Driver escluso.
Version with transparent glass, with warm white LED 3000K, lenses 40°. Driver excluded.
Version verre transparent, avec LED blanc chaud 3000K, lentille 40°. Driver exclu.



Driver forniti su richiesta come accessori.
Drivers offered on demand as accessories.
Driver fournis séparément comme accessoires.

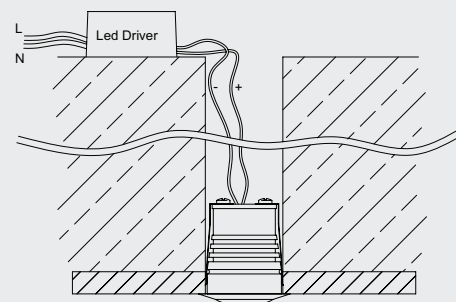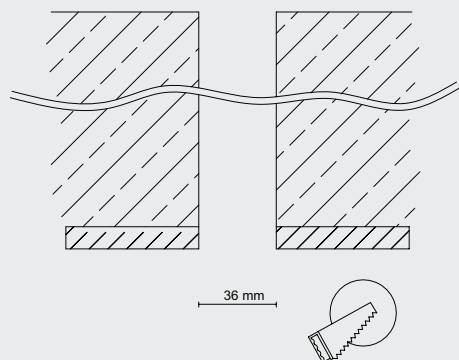

CE F IP67 III

05

LAA.5101.356








1 LEDx1,2W/2,4W 350/700mA

Versione vetro sabbato, con LED bianco freddo 5500K.
Driver escluso.
Version with sanded glass, with cold white LED 5500K.
Driver excluded.
Version verre sablé, avec LED blanc froid 5500K.
Driver exclu.

LAA.5101.358

1 LEDx1,2W/2,4W 350/700mA

Versione vetro sabbato, con LED bianco caldo 3000K.
Driver escluso.
Version with sanded glass, with warm white LED 3000K.
Driver excluded.
Version verre sablé, avec LED blanc chaud 3000K.
Driver exclu.



Driver forniti su richiesta come accessori.
Drivers offered on demand as accessories.
Driver fournis séparément comme accessoires.

CE F IP67 III

05

LAA.5101.456








1 LEDx1,2W/2,4W 350/700mA

Versione vetro trasparente, con LED bianco freddo 5500K, lente 40°. Driver escluso.
Version with transparent glass, with cold white LED 5500K, lenses 40°. Driver excluded.
Version verre transparent, avec LED blanc froid 5500K, lentille 40°. Driver exclu.


LAA.5101.458

1 LEDx1,2W/2,4W 350/700mA


Versione vetro trasparente, con LED bianco caldo 3000K, lente 40°. Driver escluso.
Version with transparent glass, with warm white LED 3000K, lenses 40°. Driver excluded.
Version verre transparent, avec LED blanc chaud 3000K, lentille 40°. Driver exclu.



Driver forniti su richiesta come accessori.
Drivers offered on demand as accessories.
Driver fournis séparément comme accessoires.

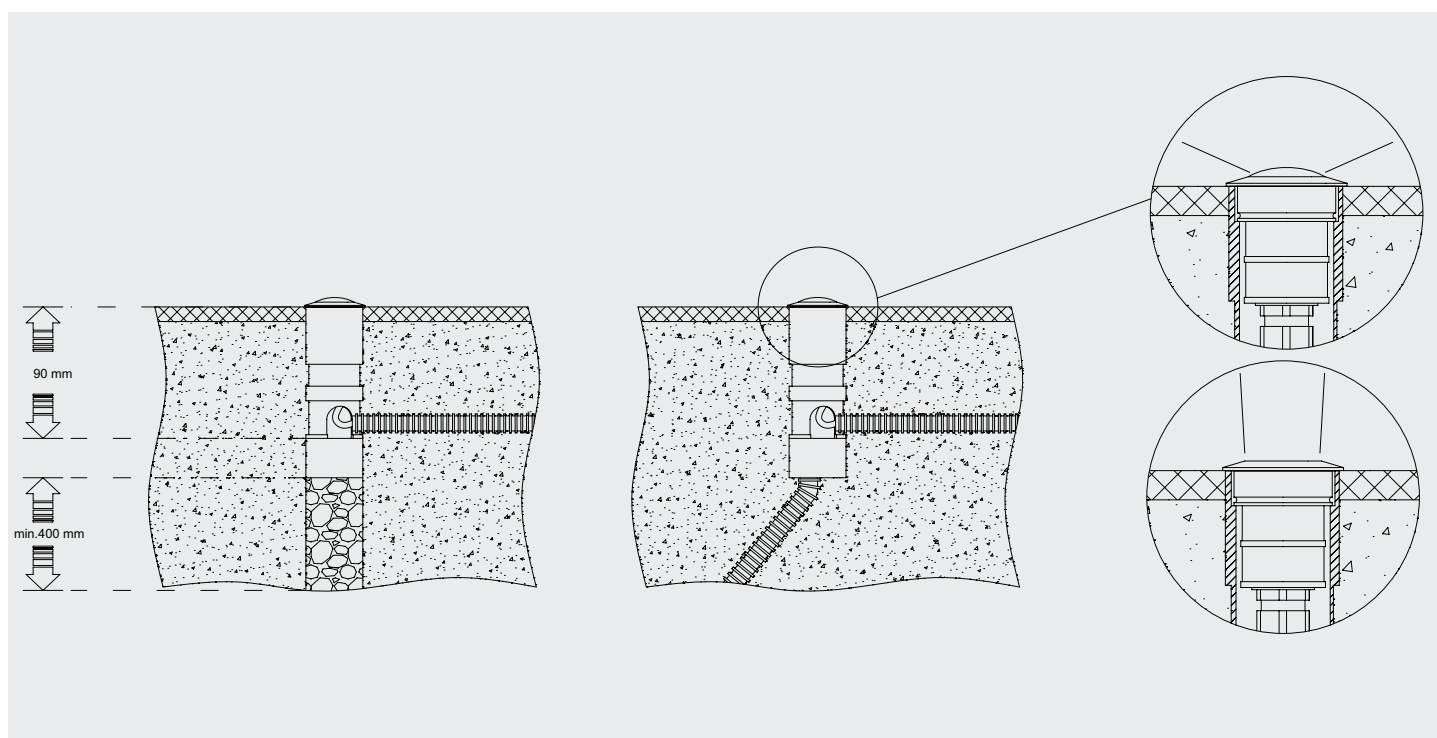


Accessori / Accessories / Accessoires




LAA.5100.001

Lente a fascio medio (24').
Medium beam lens (24').
Lentilles intensive (24').




LAA.5100.002

Lente a fascio stretto (15').
Narrow beam lens (15').
Lentilles intensive (15').




AAA.TRSL00

Driver per 1 apparecchio da 1 LED 350mA.
Driver for 1 fitting for 1 LED 350mA.
Driver pour 1 appareil de 1 LED 350mA.




AAA.TRSL05

Driver per max 8 apparecchi da 1 LED 350mA.
Driver for max 8 fittings for 1 LED 350mA.
Driver pour max 8 appareils de 1 LED 350mA.



AAA.TRSL30

Driver per 1 apparecchio da 1 LED 700mA.
Driver for 1 fitting for 1 LED 700mA.
Driver pour 1 appareil de 1 LED 700mA.



AAA.TRSL35

Driver per max 8 apparecchi da 1 LED 700mA.
Driver for max 8 fittings for 1 LED 700mA.
Driver pour max 8 appareils de 1 LED 700mA.