

serie/series

lyras 60

NEW

LED
powered by
SEOUL® LED

simmetrico
symmetric
symétriques
simétrico
symmetrisch

example code:
art. LED anodized
4695 LS3 H inx

art.

4695

design Ufficio Tecnico Landa

corpo alluminio estruso
anodizzato
body in extruded
aluminium
corps en aluminium extrudé
anodisé
cuerpo en aluminio
extrusionado y anodizado
Körper aus eloxiertem
fließgepresst Aluminium


diffusore vetro trasparente
e opale
diffuser glass transparent
and opal
diffuser verre transparent
et opale
difusor vidrio transparente
y ópalo
Diffuser Glas klar un opal



4695 inx



4695 brz



art.		art.		art.		W	mA	Type
4695LS3	10°	4695LL3	40°	4695L3		3	350	6000°K 330LM
4695LS3H		4695LL3H		4695L3H				3000°K 270LM

Accessories on request:


electronic Transformer for 1 LED cod. 0409BT012 - 20V 350mA IP67
electronic Transformer from 2 to 4 LED cod. 0409BT009 - 48V 350mA IP67

art.		art.		art.		W	mA	Type
4695LS7	10°	4695LL7	40°	4695L7		7	700	6000°K 570LM
4695LS7H		4695LL7H		4695L7H				3000°K 450LM

Accessories on request:


electronic Transformer for 1 LED cod. 0409BT011 - 11V 700mA IP67
electronic Transformer from 2 to 4 LED cod. 0409BT010 - 48V 700mA IP67

IP67




ELECTRIFICATION

LED
dettagli /
details / details
detalles / details:
pages 5-6

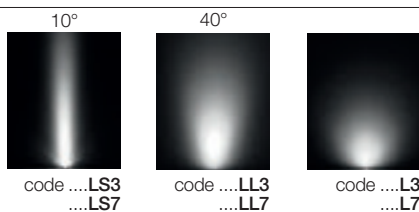

Installation example:



lyras 60



LED



code 00A469
Mounting spike