



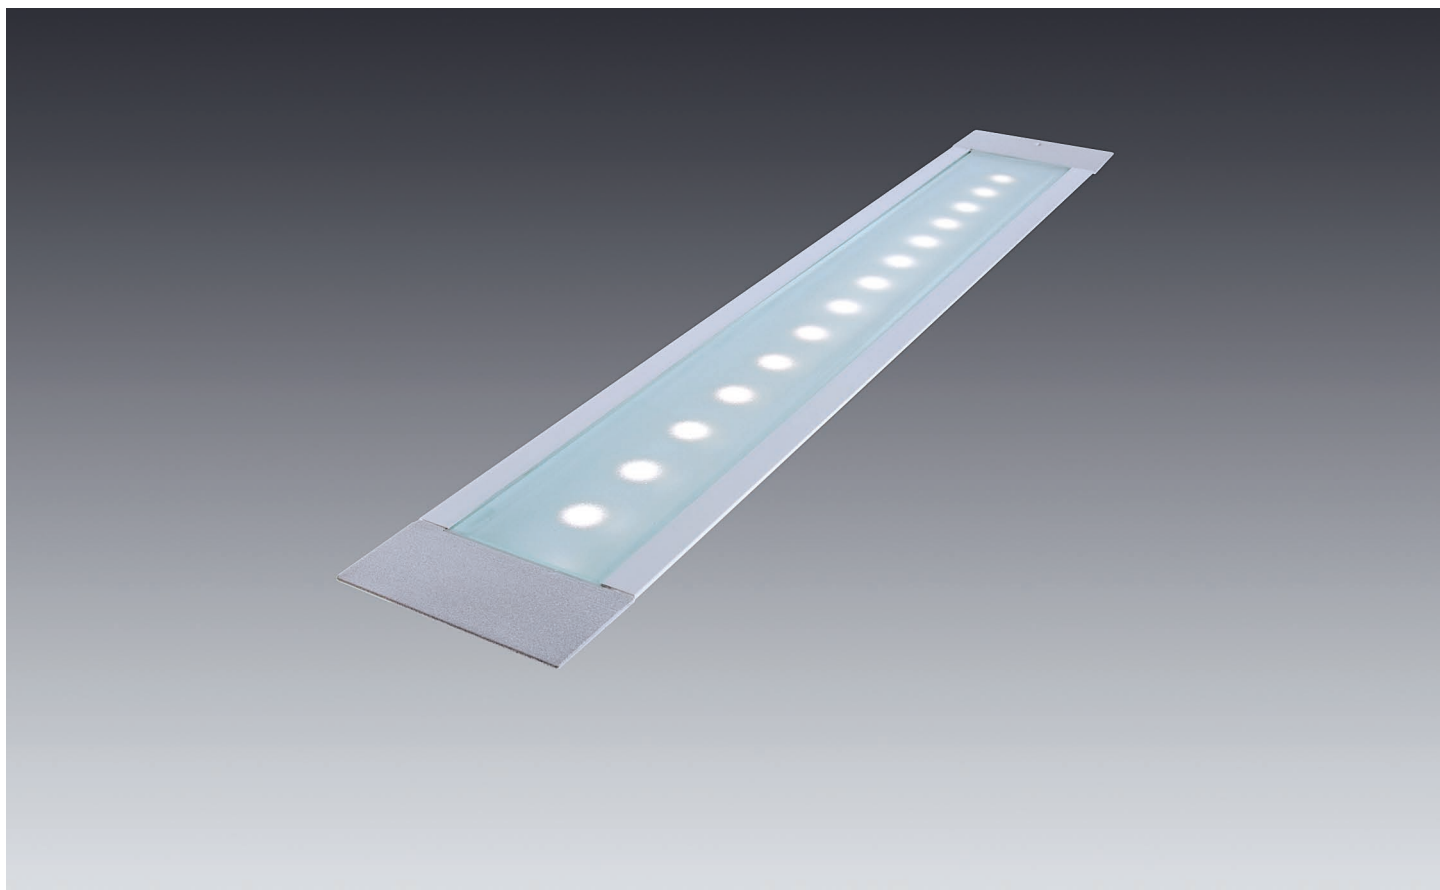

Spider Incasso LED è un apparecchio d'illuminazione per esterni nato per un uso a pavimento ma adatto anche a parete o a soffitto
 Spider Incasso LED è disponibile in tre misure da 14 a 28 LED nelle tonalità bianco caldo 3000K o bianco naturale 4000K.
 La struttura è in estruso di alluminio anodizzato con testate di chiusura in alluminio pressofuso e vetro temperato sabbiato, grado di protezione IP67.
 Alimentatore a 350 mA fornito di serie nell'apparecchio.

Spider Incasso LED is an outdoor recessed lighting fitting studied for a floor recessed use but adapt also for wall or ceiling installation.
 Available in three measures from 14 to 28 LED, warm 3000K or natural 4000K white.
 Extruded anodized aluminum structure with die-cast aluminum end caps and with tempered opal glass. IP67.
 Driver 350 mA included in the fitting.

Spider Incasso LED est un luminaire encastré pour l'extérieur né pour une installation au sol mais il est approprié aussi au mur ou au plafond.
 Spider Incasso LED est disponible en trois mesures de 14 à 28 LED en teinte de blanc chaud à 3000K ou blanc naturel de 4000K.
 Profile en extrudé en aluminium anodisé et avec embouts en fonte d'aluminium et verre opale trempé, IP65.
 Driver 350 mA inclus.

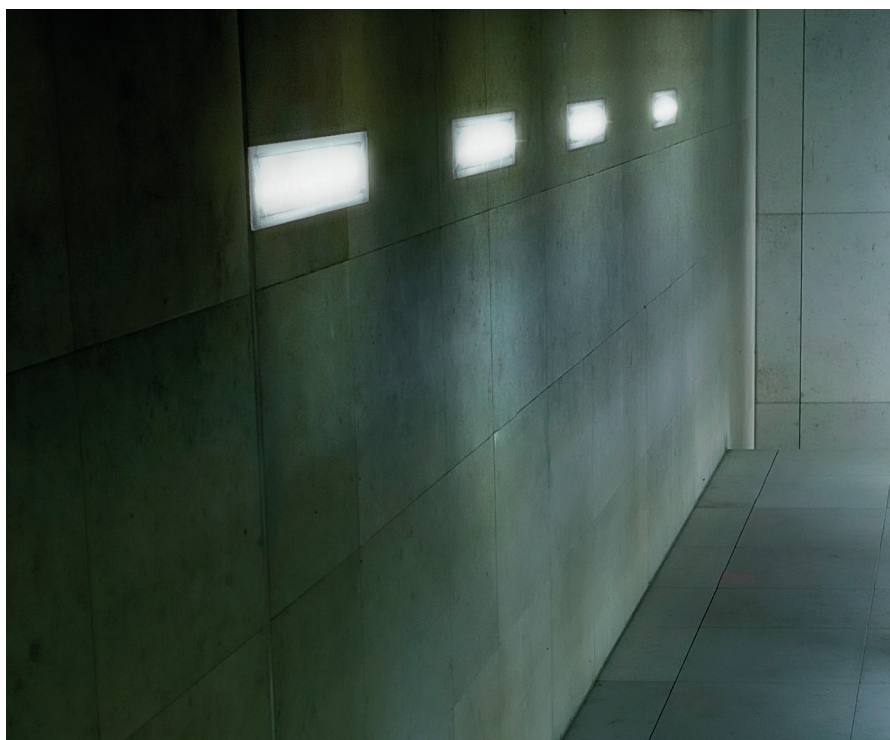

CE IP67 850°

05

JAD.140157

14 LEDX1,2W


Versione con LED tono bianco naturale 4000K.

Driver 350 mA incluso.

Version with LED natural white 4000K.

Driver 350 mA included.

Version avec LED blanc naturel 4000K. Driver 350 mA inclus.



JAD.140158

14 LEDX1,2W



Versione con LED tono bianco caldo 3000K.

Driver 350 mA incluso.


Version with LED warm white 3000K.

Driver 350 mA included.

Version avec LED blanc chaud 3000K. Driver 350 mA inclus.

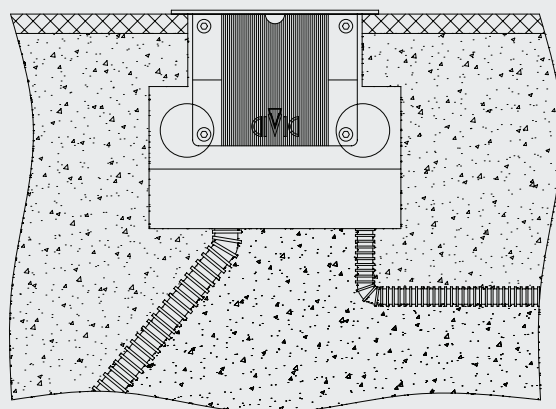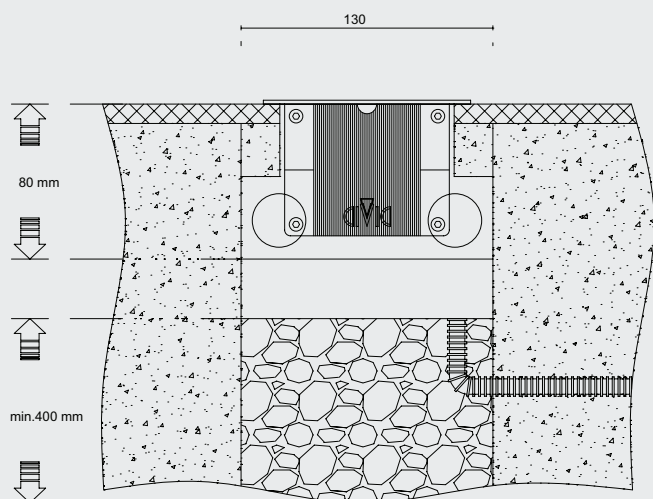

CE IP67 850° 05



JAD.210157

21 LEDX1,2W


Versione con LED tono bianco naturale 4000K.
Driver 350 mA incluso.
Version with LED natural white 4000K.
Driver 350 mA included.
Version avec LED blanc naturel 4000K. Driver 350 mA inclus.

JAD.210158

21 LEDX1,2W

Versione con LED tono bianco caldo 3000K.
Driver 350 mA incluso.
Version with LED warm white 3000K.
Driver 350 mA included.
Version avec LED blanc chaud 3000K. Driver 350 mA inclus.

CE IP67 850° 05



JAD.280157

28 LEDX1,2W




Versione con LED tono bianco naturale 4000K.
Driver 350 mA incluso.
Version with LED natural white 4000K.
Driver 350 mA included.
Version avec LED blanc naturel 4000K. Driver 350 mA inclus.

JAD.280158


28 LEDX1,2W

Versione con LED tono bianco caldo 3000K.
Driver 350 mA incluso.
Version with LED warm white 3000K.
Driver 350 mA included.
Version avec LED blanc chaud 3000K. Driver 350 mA inclus.

Installazione a soffitto

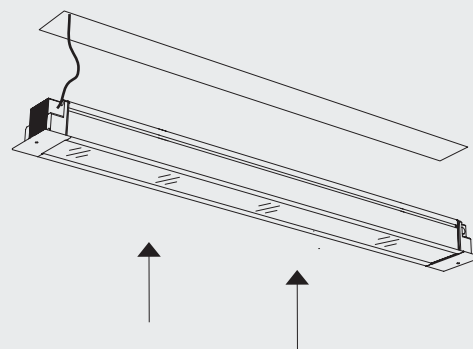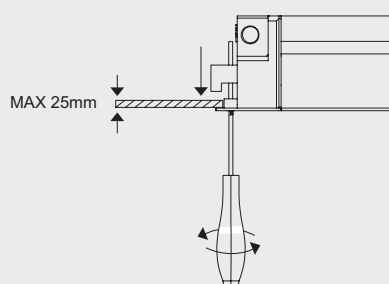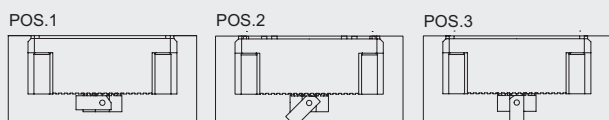


Accessori / Accessories / Accessoires

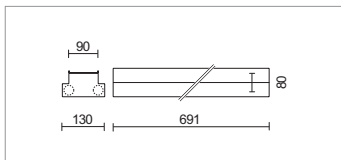


JAD.C24

Cassaforma per l'incasso da 691 mm, in lamiera zincata (spessore 1 mm).
Recessed housing (691 mm) in galvanized plate (1 mm thickness).
Boîtier d'encastrement de 691 mm, en tôle galvanisée (épaisseur 1 mm).

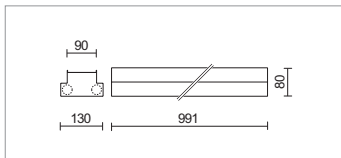


JAD.C21

Cassaforma per l'incasso da 991 mm, in lamiera zincata (spessore 1 mm).
Recessed housing (991 mm) in galvanized plate (1 mm thickness).
Boîtier d'encastrement de 991 mm, en tôle galvanisée (épaisseur 1 mm).

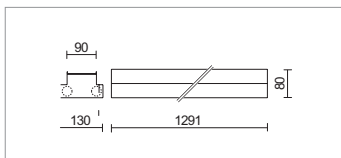

JAD.C54

Cassaforma per l'incasso da 1291 mm, in lamiera zincata (spessore 1 mm).
Recessed housing (1291 mm) in galvanized plate (1 mm).
Boîtier d'encastrement de 1291 mm, en tôle galvanisée (épaisseur 1 mm).

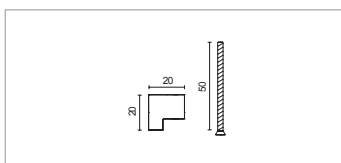

DUC.MF3

Ganci di fissaggio per l'incasso nei controsoffitti (coppia).
Fixing hook for ceiling use (pair).
Fixation pour faux plafond (couple).



JAD.CA

Cavo in acciaio anticaduta per installazione a soffitto.
Steel cable for ceiling installation.
Câble d'acier pour installation au plafond.



JAC.PC

Pressacavo IP67.
Cable gland IP67.
Presse étoupe IP67.