


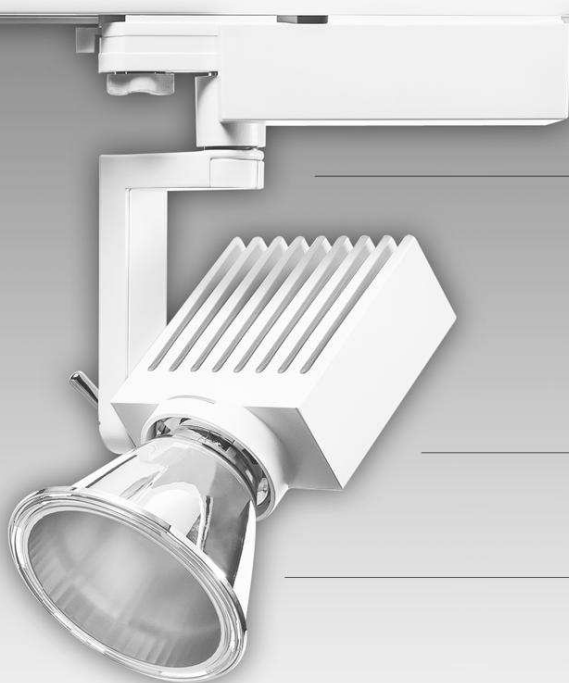

L'elettronica è integrata nel vano esterno isolato termicamente
Electronics are housed into the thermally insulated external compartment

Sistema di bloccaggio sicuro **SLS** (Safe locking system)

*Secure locking system **SLS** (Safe locking system)*

Proiettore con sorgente luminosa LED array ad alta resa cromatica, con riflettore in policarbonato metallizzato (disponibile come accessorio anche in bianco o nero). Corpo in alluminio estruso verniciato a polveri

Track spotlight with an LED array light source featuring a high colour rendering, with a metallized polycarbonate reflector (available as an accessory in black or white). Powder-coated, extruded anodised aluminium body

Possibilità di scegliere tra tre ottiche con differenti finiture a seconda delle esigenze
Possibility to choose between three optics with different finishes according to the needs




OPTICS REPLACEMENT					
Cr	Wh	Bk	Cr	Wh	Bk
10° 98259	10° 98295	10° 98298	30° 98260	30° 98296	30° 98299
60° 98261	60° 98297	60° 98300			




CRI95 4000K Natural White **CRI95** 3000K Warm White **CRI80+** 4000K Natural White **CRI80+** 3000K Warm White















70



CRI95 up to 89 lm/W 1 LED ARRAY 30W					
ON/OFF	Colours	Optics	ON/OFF	Colours	Optics
Wh 94345	N 2676 lm	10 10°	Wh 94877	N 3490 lm	10 10°
Bk 94346	W 2550 lm	30 30°	Bk 94878	W 3343 lm	30 30°
Gr 94347		60 60°	Gr 94879		60 60°
Kg 1,45 Kg		Vd 25,0 dm³		Kg 1,55 Kg	
				Vd 25,0 dm³	



CRI80+ up to 113 lm/W 1 LED ARRAY 30W					
ON/OFF	Colours	Optics	ON/OFF	Colours	Optics
Wh 95353	N 3380 lm	10 10°	Wh 95360	N 4363 lm	10 10°
Bk 95358	W 3125 lm	30 30°	Bk 95361	W 4056 lm	30 30°
Gr 95359		60 60°	Gr 95480		60 60°
Kg 1,45 Kg		Vd 25,0 dm³		Kg 1,55 Kg	
				Vd 25,0 dm³	



71