

KRISMA 2

con base
with base

design Asahara Sigeaki



Proiettore per illuminazione professionale di spazi commerciali, residenziali uffici e musei. Corpo in alluminio pressofuso verniciato a polveri previo trattamento di protezione di fondo. Disponibile con base per montaggio a parete o con adattatore a binario. Completamente orientabili sugli assi verticale ed orizzontale per consentire la massima flessibilità di puntamento.


Professional fixture for use in commercial, residential, office and museum applications. Body in cast aluminium with powder coated finish with under layer protector. Available in single mount sansy or track mounted versions. Fully directional on both the horizontal and vertical axes, giving maximum flexibility.



LUCITALIA

66


www.lucitalia.it

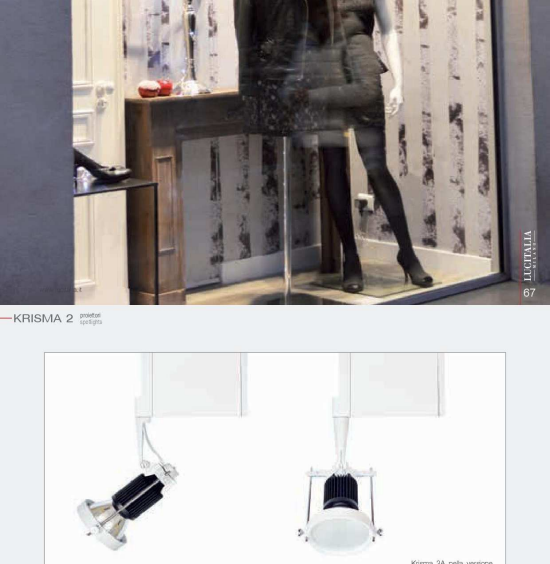

KRISMA 2 proiettore spotlight

LUCITALIA

67



Krisma 2A nella versione con adattatore per binario.
Krisma 2A spotlight with base for track.



LUCITALIA



68

www.lucitalia.it

KRISMA 2 proiettore spotlight



Krisma 2A nella versione a parete-soffitto.
Krisma 2A spotlight with base for wall or ceiling.



LUCITALIA

69

www.lucitalia.it

KRISMA 2A proiettore spotlight

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23403 32W 1 LED 3000K CRI > 85 32° 90°x90° 3400 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included LED incluso LED included

Finiture / Finish > bianco opaco / matt white **23403.01** grigio argento opaco / matt silver grey **23403.19**

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23404 32W 1 LED 3000K CRI > 85 32° 90°x90° 3400 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included LED incluso LED included

Finiture / Finish > bianco opaco / matt white **23404.01** grigio argento opaco / matt silver grey **23404.19**

KRISMA 2A proiettore a parete-soffitto con adattatore per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23426 35W HT G12 CRI > 80 16° 120°x300° 3300 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23426.01** grigio argento opaco / matt silver grey **23426.19**

23427 70W HT G12 CRI > 80 16° 120°x300° 7000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23427.01** grigio argento opaco / matt silver grey **23427.19**

23428 150W HT G12 CRI > 80 16° 120°x300° 14000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23428.01** grigio argento opaco / matt silver grey **23428.19**

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23429 35W HT G12 CRI > 80 38° 90°x90° 3300 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23429.01** grigio argento opaco / matt silver grey **23429.19**

23430 70W HT G12 CRI > 80 38° 120°x300° 7000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23430.01** grigio argento opaco / matt silver grey **23430.19**

23431 150W HT G12 CRI > 80 38° 120°x300° 14000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23431.01** grigio argento opaco / matt silver grey **23431.19**

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23429 35W HT G12 CRI > 80 38° 90°x90° 3300 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23429.01** grigio argento opaco / matt silver grey **23429.19**

23430 70W HT G12 CRI > 80 38° 120°x300° 7000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23430.01** grigio argento opaco / matt silver grey **23430.19**

23431 150W HT G12 CRI > 80 38° 120°x300° 14000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23431.01** grigio argento opaco / matt silver grey **23431.19**

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23429 35W HT G12 CRI > 80 38° 90°x90° 3300 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23429.01** grigio argento opaco / matt silver grey **23429.19**

23430 70W HT G12 CRI > 80 38° 120°x300° 7000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23430.01** grigio argento opaco / matt silver grey **23430.19**

23431 150W HT G12 CRI > 80 38° 120°x300° 14000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23431.01** grigio argento opaco / matt silver grey **23431.19**

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23429 35W HT G12 CRI > 80 38° 90°x90° 3300 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23429.01** grigio argento opaco / matt silver grey **23429.19**

23430 70W HT G12 CRI > 80 38° 120°x300° 7000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23430.01** grigio argento opaco / matt silver grey **23430.19**

23431 150W HT G12 CRI > 80 38° 120°x300° 14000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23431.01** grigio argento opaco / matt silver grey **23431.19**

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23429 35W HT G12 CRI > 80 38° 90°x90° 3300 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23429.01** grigio argento opaco / matt silver grey **23429.19**

23430 70W HT G12 CRI > 80 38° 120°x300° 7000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23430.01** grigio argento opaco / matt silver grey **23430.19**

23431 150W HT G12 CRI > 80 38° 120°x300° 14000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23431.01** grigio argento opaco / matt silver grey **23431.19**

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23429 35W HT G12 CRI > 80 38° 90°x90° 3300 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23429.01** grigio argento opaco / matt silver grey **23429.19**

23430 70W HT G12 CRI > 80 38° 120°x300° 7000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23430.01** grigio argento opaco / matt silver grey **23430.19**

23431 150W HT G12 CRI > 80 38° 120°x300° 14000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23431.01** grigio argento opaco / matt silver grey **23431.19**

KRISMA 2A proiettore a parete-soffitto con base per binario / spotlight with base for track IP40 - Classe I / Class I - CE / F

23429 35W HT G12 CRI > 80 38° 90°x90° 3300 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23429.01** grigio argento opaco / matt silver grey **23429.19**

23430 70W HT G12 CRI > 80 38° 120°x300° 7000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23430.01** grigio argento opaco / matt silver grey **23430.19**

23431 150W HT G12 CRI > 80 38° 120°x300° 14000 lm 220-240V 50/60 Hz Alimentatore elettronico incluso Electronic driver included ILLCOS: MT

Finiture / Finish > bianco opaco / matt white **23431.01** grigio argento opaco / matt silver grey **23431.19**

LUCITALIA

72

www.lucitalia.it

KRISMA 2B proiettore spotlight

LUCITALIA

73