










Adjustable recessed luminaire for discharge and very low voltage halogen lamps (12V).
Fluorescent lamps
Coated steel sheet frame.
White opaline polycarbonate louver.
Equipped with electronic ballast/transformer.

CODE	DESCRIPTION	Size (mm)	
3139 3139 EM	FSCH - 22W - 2GX13 Emergency - FSCH - 22W - 2GX13 230V - 50Hz Colour: 01 IP 40	  105 285	 Ø270
	   125 		
3148 3148 EM	FSCH - 55W - 2GX13 Emergency - FSCH - 55W - 2GX13 230V - 50Hz Colour: 01 IP 40	  113 370	 Ø350
	   126 		
3149	FSCH - 55W - 2GX13 HMG (HALOSPOT111) 100W max - G53 230V - 50Hz Colour: 01 IP 40	  145 370	 Ø350
	  		
3149 70	FSCH - 55W - 2GX13 MR (CDM-R111) - 70W - GX8.5 230V - 50Hz Colour: 01 IP 40	  145 370	 Ø350
	  		




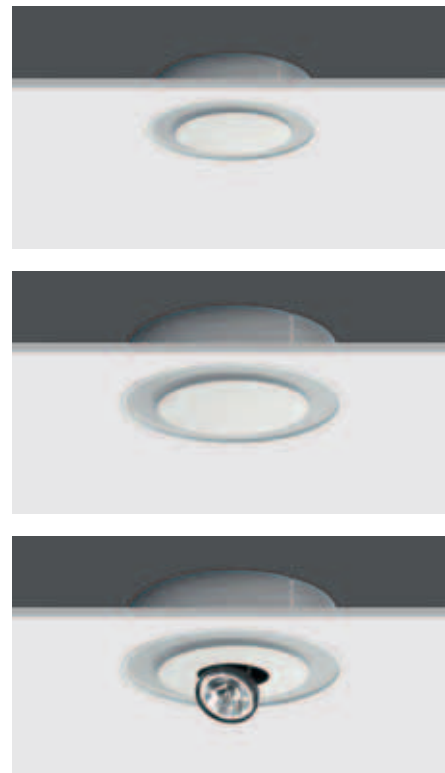


PHOTOMETRIC CURVES

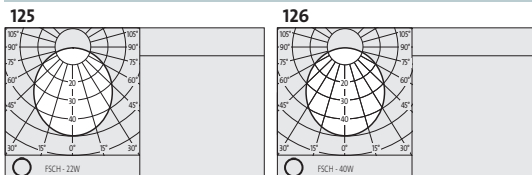

01 white

NOTE

CODE	DESCRIPTION	Size (mm)
3149 RGB	25 LED - 7.2W - 300mA HMG (HALOSPOT111) - 100W max - G53	 145
3149 RGB 70	25 LED - 7.2W - 300mA MR (CDM-R111) - 70W - GX8.5 230V - 50Hz Colour: 01 IP 40	 370
		
3135	FSCH - 22W - 2GX13 230V - 50Hz Colour: 01 IP 40	 70
		 300
3133	FSCH - 55W - 2GX13 230V - 50Hz Colour: 01 IP 40	 70
		 360

