

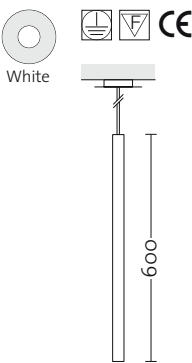


High-bay modules with LED lighting system.
 Equipped with electronic ballast.
 Luminaire housing: coat finish extruded aluminium profile
 Light sources: hot and cold white LED
 Finishing: white (white power supply cable), black (black power supply cable),
 chrome (black power supply cable), grey (black power supply cable)

SMOKE LED

CODE	DESCRIPTION	Size (mm)
LENGTH 200 mm - DIAMETER 25 mm		
4100 BIC 10	10° beam, hot white LED - 3000K - 80 lm	
4100 BIC 25	25° beam, hot white LED - 3000K - 80 lm	
4100 BIC 45	45° beam, hot white LED - 3000K - 80 lm	
4100 BIN 10	10° beam, neutral white LED - 4200K - 90 lm	
4100 BIN 25	25° beam, neutral white LED - 4200K - 90 lm	
4100 BIN 45	45° beam, neutral white LED - 4200K - 90 lm	
4101 BIC 10	10° beam, hot white LED - 3000K - 80 lm	
4101 BIC 25	25° beam, hot white LED - 3000K - 80 lm	
4101 BIC 45	45° beam, hot white LED - 3000K - 80 lm	
4101 BIN 10	10° beam, neutral white LED - 4200K - 90 lm	
4101 BIN 25	25° beam, neutral white LED - 4200K - 90 lm	
4101 BIN 45	45° beam, neutral white LED - 4200K - 90 lm	
4102 BIC 10	10° beam, hot white LED - 3000K - 80 lm	
4102 BIC 25	25° beam, hot white LED - 3000K - 80 lm	
4102 BIC 45	45° beam, hot white LED - 3000K - 80 lm	
4102 BIN 10	10° beam, neutral white LED - 4200K - 90 lm	
4102 BIN 25	25° beam, neutral white LED - 4200K - 90 lm	
4102 BIN 45	45° beam, neutral white LED - 4200K - 90 lm	

LENGTH 200 mm - DIAMETER 25 mm

10° beam, hot white LED - 3000K - 80 lm
 25° beam, hot white LED - 3000K - 80 lm
 45° beam, hot white LED - 3000K - 80 lm
 10° beam, neutral white LED - 4200K - 90 lm
 25° beam, neutral white LED - 4200K - 90 lm
 45° beam, neutral white LED - 4200K - 90 lm
 1 LED - 1W - 350 mA
 230V - 50Hz
 Colour: 01 - 02 - 14 - 18
 IP 40
Electronic ballast
 Complete with cable and jack

LENGTH 400 mm - DIAMETER 25 mm

10° beam, hot white LED - 3000K - 80 lm
 25° beam, hot white LED - 3000K - 80 lm
 45° beam, hot white LED - 3000K - 80 lm
 10° beam, neutral white LED - 4200K - 90 lm
 25° beam, neutral white LED - 4200K - 90 lm
 45° beam, neutral white LED - 4200K - 90 lm
 1 LED - 1W - 350 mA
 230V - 50Hz
 Colour: 01 - 02 - 14 - 18
 IP 40
Electronic ballast
 Complete with cable and jack

LENGTH 600 mm - DIAMETER 25 mm

10° beam, hot white LED - 3000K - 80 lm
 25° beam, hot white LED - 3000K - 80 lm
 45° beam, hot white LED - 3000K - 80 lm
 10° beam, neutral white LED - 4200K - 90 lm
 25° beam, neutral white LED - 4200K - 90 lm
 45° beam, neutral white LED - 4200K - 90 lm
 1 LED - 1W - 350 mA
 230V - 50Hz
 Colour: 01 - 02 - 14 - 18
 IP 40
Electronic ballast
 Complete with cable and jack





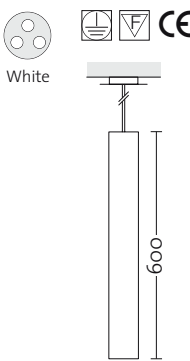
01 white - white power supply cable
 02 black - black power supply cable
 14 chrome - black power supply cable
 18 grey - black power supply cable

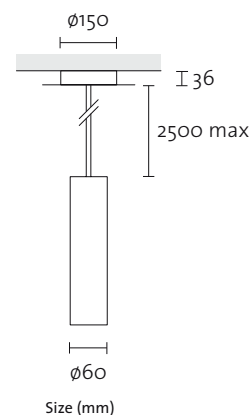
NOTE

High-bay modules with LED lighting system.
 Equipped with electronic ballast.
 Luminaire housing: coat finish extruded aluminium profile
 Light sources: hot and cold white LED
 Finishing: white (white power supply cable), black (black power supply cable),
 chrome (black power supply cable), grey (black power supply cable)

SMOKE LED

DESIGN - ANDREA ZANINI - AZ DESIGN

CODE	DESCRIPTION	Size (mm)
LENGTH 200 mm - DIAMETER 60 mm		
4103 BIC 10	10° beam, hot white LED - 3000K - 420 lm	
4103 BIC 25	25° beam, hot white LED - 3000K - 420 lm	
4103 BIC 45	45° beam, hot white LED - 3000K - 420 lm	
4103 BIN 10	10° beam, neutral white LED - 4200K - 463 lm	
4103 BIN 25	25° beam, neutral white LED - 4200K - 463 lm	
4103 BIN 45	45° beam, neutral white LED - 4200K - 463 lm	
4104 BIC 10	10° beam, hot white LED - 3000K - 420 lm	
4104 BIC 25	25° beam, hot white LED - 3000K - 420 lm	
4104 BIC 45	45° beam, hot white LED - 3000K - 420 lm	
4104 BIN 10	10° beam, neutral white LED - 4200K - 463 lm	
4104 BIN 25	25° beam, neutral white LED - 4200K - 463 lm	
4104 BIN 45	45° beam, neutral white LED - 4200K - 463 lm	
4105 BIC 10	10° beam, hot white LED - 3000K - 420 lm	
4105 BIC 25	25° beam, hot white LED - 3000K - 420 lm	
4105 BIC 45	45° beam, hot white LED - 3000K - 420 lm	
4105 BIN 10	10° beam, neutral white LED - 4200K - 463 lm	
4105 BIN 25	25° beam, neutral white LED - 4200K - 463 lm	
4105 BIN 45	45° beam, neutral white LED - 4200K - 463 lm	



01 white - white power supply cable
 02 black - black power supply cable
 14 chrome - black power supply cable
 18 grey - black power supply cable



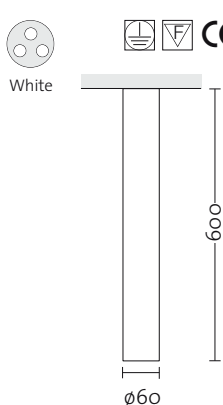
NOTE



Ceiling module with LED lighting system.
 Completo di alimentatore elettronico.
 Corpo apparecchio: profilo di alluminio estruso verniciato
 Sorgenti luminose: LED bianchi a luce calda e luce fredda
 Finishing: white, black, chrome, grey

SMOKE LED

DESIGN - ANDREA ZANINI - AZ DESIGN

CODE	DESCRIPTION	Size (mm)
LENGTH 200 mm - DIAMETER 60 mm		
4106 BIC 10	10° beam, hot white LED - 3000K - 420 lm	
4106 BIC 25	25° beam, hot white LED - 3000K - 420 lm	
4106 BIC 45	45° beam, hot white LED - 3000K - 420 lm	
4106 BIN 10	10° beam, neutral white LED - 4200K - 463 lm	
4106 BIN 25	25° beam, neutral white LED - 4200K - 463 lm	
4106 BIN 45	45° beam, neutral white LED - 4200K - 463 lm	
	3 LED - 1W - 350 mA 230V - 50Hz Colour: 01 - 02 - 14 - 18 IP 40 Electronic ballast	
LENGTH 400 mm - DIAMETER 60 mm		
4107 BIC 10	10° beam, hot white LED - 3000K - 420 lm	
4107 BIC 25	25° beam, hot white LED - 3000K - 420 lm	
4107 BIC 45	45° beam, hot white LED - 3000K - 420 lm	
4107 BIN 10	10° beam, neutral white LED - 4200K - 463 lm	
4107 BIN 25	25° beam, neutral white LED - 4200K - 463 lm	
4107 BIN 45	45° beam, neutral white LED - 4200K - 463 lm	
	3 LED - 1W - 350 mA 230V - 50Hz Colour: 01 - 02 - 14 - 18 IP 40 Electronic ballast	
LENGTH 600 mm - DIAMETER 60 mm		
4108 BIC 10	10° beam, hot white LED - 3000K - 420 lm	
4108 BIC 25	25° beam, hot white LED - 3000K - 420 lm	
4108 BIC 45	45° beam, hot white LED - 3000K - 420 lm	
4108 BIN 10	10° beam, neutral white LED - 4200K - 463 lm	
4108 BIN 25	25° beam, neutral white LED - 4200K - 463 lm	
4108 BIN 45	45° beam, neutral white LED - 4200K - 463 lm	
	3 LED - 1W - 350 mA 230V - 50Hz Colour: 01 - 02 - 14 - 18 IP 40 Electronic ballast	



01 white
 02 black
 14 chrome
 18 grey

NOTE