

# Technical data sheet

All right reserved Landa illuminotecnica S.p.A.  
will reserve to change the specific note without  
any written notice.

**LANDA**<sup>®</sup>  
illuminotecnica

## Brick Light

Article 412PL9_413PL9
Product type wall recessed
Body material Die-casting aluminium EN4610, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in sand blasted finish 4mm thick and silicon gasket.
Screws in A2 stainless steel
Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre.
Ring in stainless steel AISI 316L 4mm thick
Electromagnetic ballast

IK03

IP54



G23 9W 240W Fluorescent

IP5X


IPX4



Loop in  
Loop out

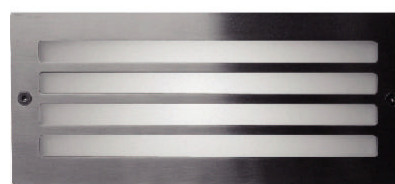

Photometric:

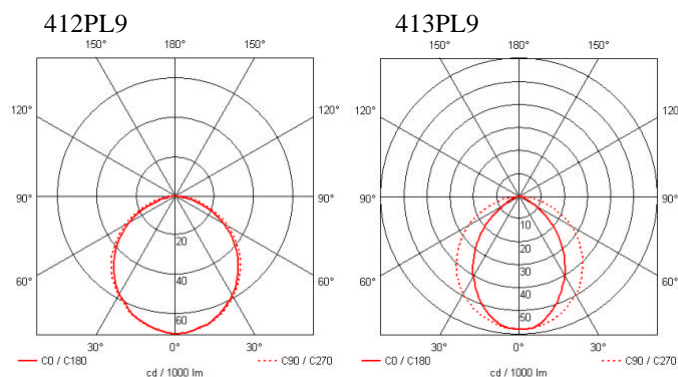

BOX DIMENSION

