

# Technical data sheet

All right reserved Landa illuminotecnica S.p.A.  
will reserve to change the specific note without  
any written notice.

**LANDA**<sup>®</sup>  
illuminotecnica

## DOLBY

Article 455LMB16X2 LED Cold White	455LMB16X2H LED Warm White
Product type wall light	
Body material Die-casting aluminium EN47100, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.	
Transparent tempered glass diffuser 10mm thickness , transparent plexiglass 8 mm thickness and silicon gaskets	
Screws in A2 stainless steel	
Colours available: Metalgrey and Graphite	
Powered by Acriche Seoul LED	
AC Direct connection 240V NO TRANSFORMER REQUIRED	

IK08

IP66

455LMB16X2	W	LM	°K	BEAM
Down LED	12	780	6000	12°
Up LED	4	300	6000	40°


455LMB16X2H	W	LM	°K	BEAM
Down LED	12	660	3500	12°
Up LED	4	250	3500	40°

IP6X

IPX6



CE

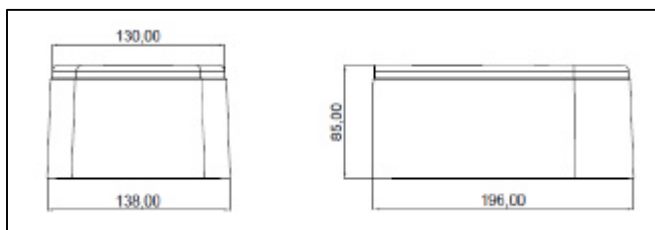

Photometric:

