

# Technical data sheet

All right reserved Landa illuminotecnica S.p.A.  
will reserve to change the specific note without  
any written notice.

**LANDA**<sup>®</sup>  
illuminotecnica

## Lyra 80

Article 466LS3
Product type spot or projector
Body material Die-casting aluminium EN47100 and in extruded aluminium, prior the painting process, de-burred. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in transparent 10mm thick and silicon gasket.
Screws in A2 stainless steel
Colours available: Metalgrey and Graphite
Beams: 466LS3 = 1x 10°+10°

IK08

IP66

850°C

Transformer Included

White LED 6300°K



10°+10°-240 lm-3180 lux-13230 cd

High power LED 3W


IP6X



IPX6

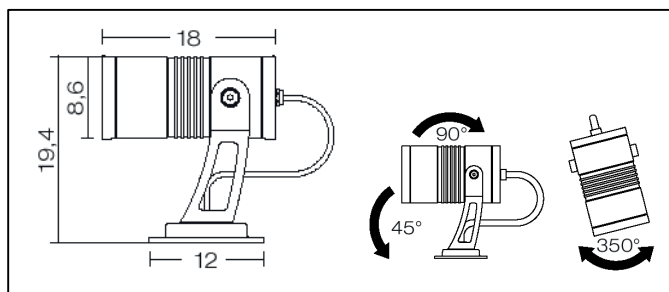

Photometric:

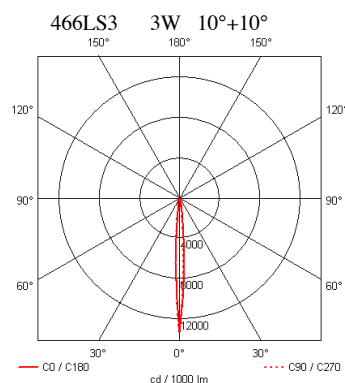

CODE 466LS3 Beam 10	
MT	LUX
0.5	12706
1	3176
1.5	1412
2	794
2.5	508
3	353
4	199
5	127