

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.



LANDA[®]
illuminotecnica

Lyra 80


Article 467LS3 _ 467LL3
Product type spot or projector
Body material Die-casting aluminium EN47100 and in extruded aluminium, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in transparent 10mm thick and silicon gasket.
Screws in A2 stainless steel
Colours available: Metalgrey and Graphite
Beams: 467LS3 = 1x 10°+10° 467LL3 = 1x 45°+45°
Included: 1 mt of cable H05RN-F, single connector IP68, ceiling/wall mounting plate, transformer 240V to 12V

IK08
IP66
850°C

White LED 6300°K
10°+10° 240 lm 3180 cd
45°+45° 240 lm 320 cd
High power LED 3W

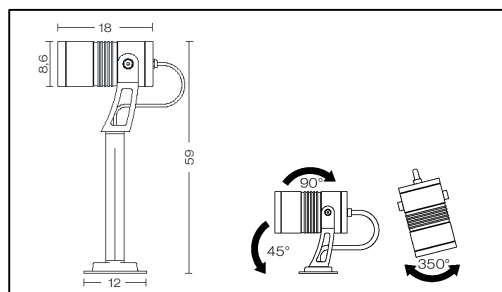

Photometric:

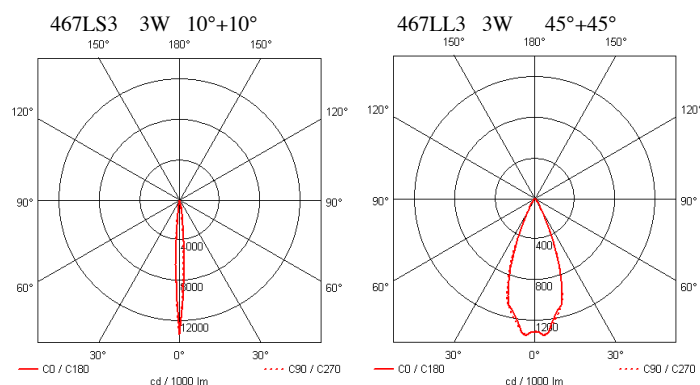

Accessories



For external use only

code 00K465.02
Reflector
for art. 465-467-468

code 00A465
Mounting spikes
for art. 466-467

code 00K465.01
Vane
for art. 466-467

code 0434M003
Loop in loop out (NMI)
for art. 466-467