



Barra LED IP20



LED light fitting

Elegant led profiles provided with lens able to diffuse light (angles of 30°, 60°, 90°) in an extremely uniform way also in presence of obstacles. Barra led can be used to highlight architectural elements of interiors, shop windows, shows or museums where the direction of the light and minimal light fitting is very important.

Available in colour temperature 3000K or 4000K and in various lengths. Tridonic Led.

In accordance with standard CEI EN 60598-1 (CEI 34-21), CEI EN 62031 (34-118), CEI EN 62471 (76-9).



Barra LED IP20




Code	Lamps Watt	Flux lm	Light beam	L mm	3000 K
S180X0600KI	12	324	30°	600	
S180X0600KU	12	324	60°	600	
S180X0600KW	12	324	90°	600	
S180X1000KI	18	486	30°	1000	
S180X1000KU	18	486	60°	1000	
S180X1000KW	18	486	90°	1000	
S180X1200KI	21	567	30°	1200	
S180X1200KU	21	567	60°	1200	
S180X1200KW	21	567	90°	1200	
S180X1500KI	27	729	30°	1500	
S180X1500KU	27	729	60°	1500	
S180X1500KW	27	729	90°	1500	

Code	Lamps Watt	Flux lm	Light beam	L mm	4200 K
S180Y0600KI	12	352	30°	600	
S180Y0600KU	12	352	60°	600	
S180Y0600KW	12	352	90°	600	
S180Y1000KI	18	528	30°	1000	
S180Y1000KU	18	528	60°	1000	
S180Y1000KW	18	528	90°	1000	
S180Y1200KI	21	616	30°	1200	
S180Y1200KU	21	616	60°	1200	
S180Y1200KW	21	616	90°	1200	
S180Y1500KI	27	792	30°	1500	
S180Y1500KU	27	792	60°	1500	
S180Y1500KW	27	792	90°	1500	



LED Light fittings in extruded aluminium with PMMA optics .
Available in three different beam angles (30°, 60° or 90°) and in two colour temperatures (3000 K or 4200 K).
LED operating voltage 24V

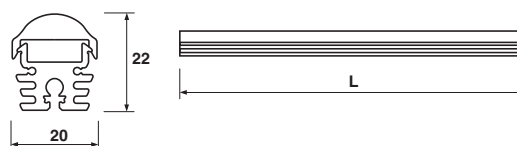

Barra LED IP20 RGB




Code	Lamps Watt	Light beam	L mm
S180K1200KU	13,5	60	1200



TO COMPLETE WITH DRIVER AND LIGHT MANAGEMENT SYSTEM: SEE PAGE 464 AND PAGE 480

RGB LED Light fittings in extruded aluminium with PMMA optics .
Available in three different beam angles (30°, 60° or 90°).
LED operating voltage 24V

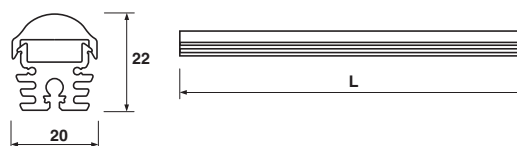

Barra LED IP20 Accessories



Code

A180K0001BK


Mounting plate (1 pc.)



Code

A180K0003KK

Adjustable bracket (1 pc.).

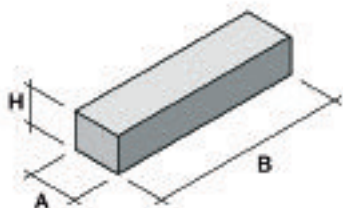

Code	Power Watt	A mm	B mm	H mm
E924K0035KK	35	40	155	30
E924K0075KK	75	47	220	44
E924K0100KK	100	64	230	40

Electronic transformer (output 24V).

