

GHOST



Recessed luminaire
 Ø 158 mm - Fixed optical component
 HMG (HALOSPOT111)
 100W max - 12V - G53



Recessed luminaire
 Ø 75 mm - Fixed optical component
 HRGI - 35W max - 12V - GU4



Recessed luminaire
 Ø 90 mm - Fixed optical component
 HRGI - 50W max - 12V - GU5.3

Recessed luminaires are among the most common lighting solutions for exhibition areas. Due to their typology and dimensions, these luminaires well adapt to any architectural context, thus resolving all lighting challenges. The choice of such lighting solutions depends however on the depth of the false-ceiling that is sometimes too low, and on the need to use specific light sources. The main features of Ghost recessed luminaires are their suitability for use in low ceiling rooms and louvers that eliminate glare.

Technical specifications

The Ghost family features recessed luminaires for very low voltage halogen lamps 12V. The mainframe is completely made of UV-stabilised epoxy polyester steel sheet. These round luminaires are available in three different sizes, i.e. Ø75 mm, Ø90 mm and Ø158 mm. The optical assemblies cannot be adjusted as they are fixed to a die-cast aluminium ring and set further back from the outer edge of the luminaire. The spring locking systems allow very quick and simple installation of the light sources. The three finishing colours are: white, silver, black.

Optical components and light sources

Ghost series luminaires use very low voltage halogen lamps 12V, max 35W; GU4, max 50W; GU5.3, max 100W; 12V; G53.

VERY LOW VOLTAGE HALOGEN LAMPS (12V)		
	HMG (HALOSPOT111) - G53	max 100W
	HRGI - 12V - GU5.3	max 50W
	HRGI - 12V - GU4 - Ø 35 mm	35W
MAINS VOLTAGE HALOGEN LAMPS		
	HSGI - GZ10	max 50W

Structural features


Installation: recessed
 Luminaire housing: sheet steel and die-cast aluminium
 Light sources: very low voltage halogen lamps (12V)
 Standard finishing: white, grey, black
 Protection class: IP43
 Insulation class: III
 Power supply: very low voltage 12V




Fixed recessed luminaire for very low voltage halogen lamps (12V).
Separate power supply 12V
Ballast not included.

CODE	DESCRIPTION
1254	HMG (HALOSPOT111) 100W max - 12V - G53 Colour: 01 - 02 - 18 IP 43 Kg 0.40



ACCESSORIES	
799	Lamp frame for installation of discharge lamps CDM-R111 

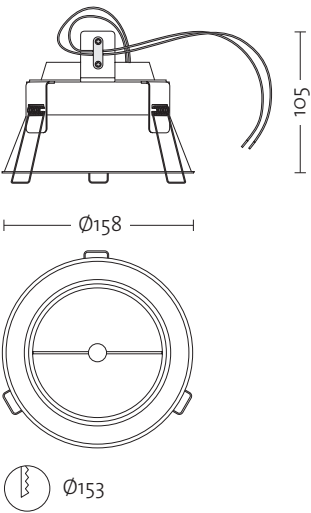

Dimensions

- 01 white
- 02 black
- 18 grey

NOTE

Fixed recessed luminaire for very low voltage halogen lamps (12V).
Separate power supply 12V.
Ballast not included.

GHOST




DESIGN - QUATTROBI TECHNICAL DEPARTMENT

CODE	DESCRIPTION	
1250	HRGI - 50W max - 12V - GU5.3 Colour: 01 - 02 - 18 IP 43 Kg 0.17	   




1252	HRGI - 35W max - 12V - GU4 Colour: 01 - 02 - 18 IP 43 Kg 0.13	   
-------------	--	--




ACCESSORIES		
794	Connection kit HMG - 50W max - GZ10 250V max	  

Using the kit 794, the product becomes a class II luminaire
(only for code 1250)



793	Connection kit MR - 35W - GX10 (only for code 1250)	  
------------	---	---

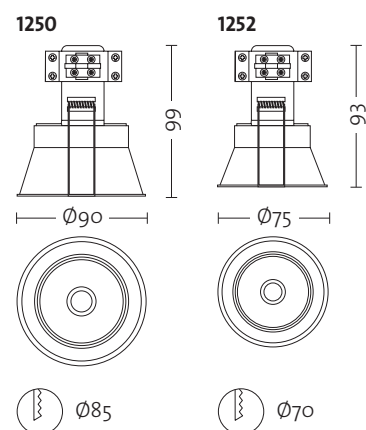

Dimensions

01 white
02 black
18 grey

NOTE