




Ginevra

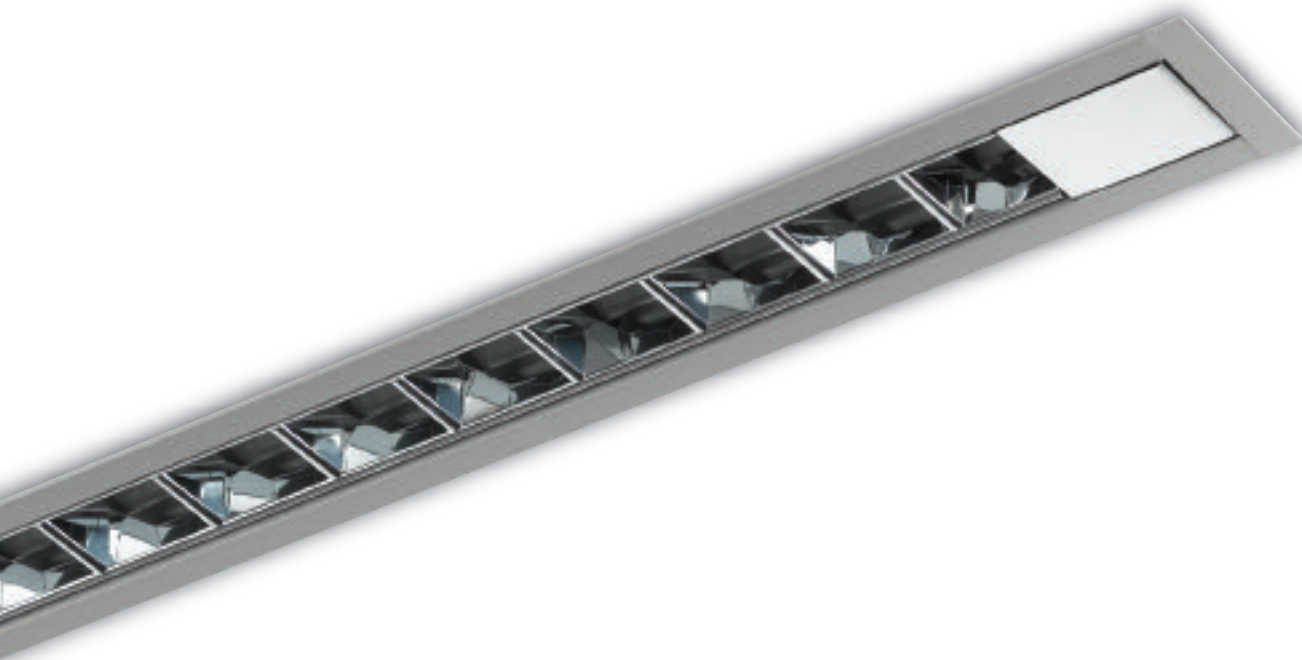

Recessed light fitting

Recessed light fitting for T5 lamps.

Materials

Body: anodized extruded aluminium.

Optic: Low luminance high gloss louvre in anodized aluminium 99,9% or opal PMMA diffuser.

Standard: IEC 598, EN 60598-1 (CEI 34-21), CEI EN 60598-2-2 (CEI 34-31), CEI EN 62031 (CEI 34-118), CEI EN 62471 (CEI 76-9).

Emergency wiring according to CEI EN 60598-2-22 (CEI 34-22).

Wiring

Standard: electronic ballast 220-240V 50/60Hz.

Other possibilities: dimmable ballast and/or emergency kit.



Ginevra



Code	Lamps Watt	L mm
E101D1024AL	1x14/24	595
E101D1054AL	1x28/54	1195
E101D1080AL	1x35/49/80	1495




Code	Lamps Watt	L mm
E101D1024AO	1x14/24	595
E101D1054AO	1x28/54	1195
E101D1080AO	1x35/49/80	1495



One lamp recessed light fitting in extruded aluminium. Slim shape. Low luminance high gloss louvre (in accordance with standard EN 12464-1) or opal diffuser.

End caps, wire suspensions and supply cable to be order separately (pag. 146).

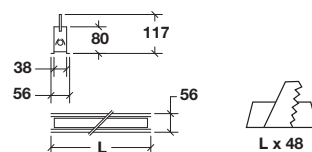



Ginevra LED



Code	Lamps Watt	L mm
E101Y0600AO	11	595
E101Y1200AO	22	1195
E101Y1500AO	27	1495

Recessed Led, extruded aluminium profile ballast 24 Volt included.





Code	Lamps Watt	L mm
E101Y0094AO	3	


LED Lighted corner. Ballast 24 V and connection accessories included.



Recessed LED, anodized profile in aluminium. Ballast 24 V included.

End caps to be order separately (pag. 146).






Code

A101K0008AK


End cap 1pc.



Code

A101K0003AK

Accessory for linear connection, 2 pcs.

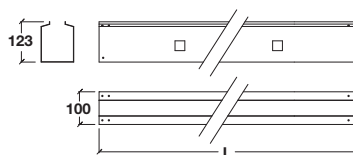

Code

A101K0600KK

A101K1200KK

A101K1500KK

Lamps
Watt

L
mm

14/24

28/54

35/49/80

595

1195

1495

Recessed housing for wall



Code

A101K0020KK

End cap for wall recessed housing (1pc.)

