

New Eco



Recessed "New ECO"

"New Eco" is a collection of light fittings for fluorescent lamps.

They are available for T8 and T5 lamps direct light with various type of louvers, diffusers and reflectors. All the articles are easy to install in any false ceiling. They can be used in offices, schools and commercial areas.

Materials

Body in white zinc coated steel for dropceilings (panels mm 600x600 with exposed supports). Various type of louvres or

diffusers (see following pages). Fluorescent lamps are not included.

Wiring

Starter wiring 230-50Hz with power factor correction, or with electronic ballasts 220-240 50/60Hz electrical components with ENEC approval.

Rigid cable H05V2-U section 0,75 mm² (CEI 20-20). Socket terminal 2P+T (section max 2,5mm²). Wiring on request with dimmable ballast and/or with emergency light.

In accordance with standard IEC 598, CEI EN 60598-1 (CEI 34-21), CEI EN 60598-2-2 (CEI 34-31).

Emergency wiring in accordance with standard CEI EN 60598-2-22 (CEI 34-22).



New Eco T8

...L



Code	Lamps Watt	starter wiring
R126D4018BL	4x18W	high gloss low luminance louvre
R126D4018BD	4x18W	ruled lamellar louvre

Code	Lamps Watt	electronic ballast
E126D4018BL	4x18W	high gloss low luminance louvre
E126D4018BD	4x18W	ruled lamellar louvre

...D



Codice	accessories
--------	-------------

A126K0001KK

Fixing accessories (4 pcs.)




pag. 357

Fully recessed light fittings for T8 lamps direct light.

Louvre low luminance in high gloss (L) aluminium 99,9% anodized; louvre with aluminium ruled blades (D). Automatic fixing with security clamps.

Wiring on request

R ____ E one lamp emergency continuous light with magnetic ballast
E ____ E one lamp emergency continuous light with electronic ballast

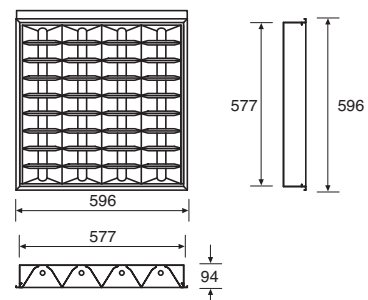

New Eco T8



Code	Lamps Watt	starter wiring
R126D4018BP	4x18W	prism diffuser
R126D4018BO	4x18W	opal diffuser

Code	Lamps Watt	electronic ballast
E126D4018BP	4x18W	prism diffuser
E126D4018BO	4x18W	opal diffuser

Codice	accessories
A126K0001KK	

Fixing accessories (4 pcs.)




Fully recessed light fittings for T8 lamps direct light.

Level diffuser in opal (O) or prismatic (P) metacrylate fixed to the body by security clamps.

Wiring on request

R ____ E one lamp emergency continuous light with magnetic ballast
E ____ E one lamp emergency continuous light with electronic ballast

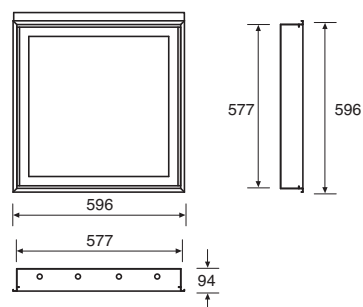

New Eco T5



Code	Lamps Watt	high gloss low luminance louvre
------	---------------	---------------------------------

E126U4014BL	4x14W	
E126U4024BL	4x24W	

Code	accessories
------	-------------

A126K0002KK	
-------------	--

Fixing accessories (4 pcs.)



Fully recessed light fittings for T8 lamps direct light.

Louvre low luminance in high gloss (L) 99,9% anodized aluminium with transverse parabolic blades completely closed in the upper part.

Wiring on request

_____ E one lamp emergency continuous light with electronic ballast

