







Adjustable recessed luminaire for discharge and very low voltage halogen lamps (12V). Anodised extruded aluminium structure, die-cast aluminium optical assembly. Separate power supply: 230V - 50Hz (discharge lamps) 12V (halogen lamps). Ballast not included.

CODE	DESCRIPTION	SIZE (mm)
9301	MR (CDM-R111) - 35W - 70W - GX8.5 Colour: 01 - 18 IP 43 Weight 0.95 Kg	
9300	MT (CDM-T) - 35W - 70W - 150W - G12 Colour: 01 - 18 IP 43 Weight 0.95 Kg	
3103	MT (CDM-T) - 35W - 70W - 150W - G12 Colour: 18 IP 43 Weight 1.80 Kg	
3203	MT (CDM-T) - 2 x 35W - 70W - 150W - G12 Colour: 18 IP 43 Weight 2.25 Kg	
3204	MT (CDM-T) - 35W - 70W - 150W - G12 HMG - 100W max - 12V - G53 Colour: 18 IP 40 Weight 2.20 Kg	



PHOTOMETRIC CURVES

71





NOTE

01 white

18 grey

The optical housing can be adjusted separately on both axes. Luminaires with discharge lamps have a tempered glass louver.

Adjustable recessed luminaire for discharge and very low voltage halogen lamps (12V). Anodised extruded aluminium structure, die-cast aluminium optical assembly. Separate power supply: 230V - 50Hz (discharge lamps) 12V (halogen lamps). Ballast not included.



CODICE	DESCRIPTION	SIZE (mm)
3303	MT (CDM-T) - 35W - 70W - 150W - G12 HMG - 2 x 100W max - 12V - G53 Colour: 18 IP 40 Weight 2.50 Kg	
3406	MT (CDM-T) - 2 x 35W - 70W - 150W - G12 HMG - 2 x 100W max - 12V - G53 Colour: 18 IP 40 Weight 3.00 Kg	



ACCESSORIES

585	Anodised aluminium adapter for coloured filters Filter colours: sand-blasted, yellow, red, green, blue Code 585 can only be used for optical assemblies with HALOSPOT111 lamps	
422	35W Power-factor-corrected electromechanical ballast for luminaires with metal iodide lamps	
422/T	with timed starter	
424	70W Power-factor-corrected electromechanical ballast for luminaires with metal iodide lamps	
424/T	with timed starter	
426	150W Power-factor-corrected electromechanical ballast for luminaires with metal iodide lamps	
426/T	with timed starter	
423	35W Electronic ballast for luminaires with metal iodide lamps	
425	70W Electronic ballast for luminaires with metal iodide lamps	
427	150W Electronic ballast for luminaires with metal iodide lamps	
416	70W Electronic transformer A=110 - B=50 - C=35	
417	105W Electronic transformer A=110 - B=50 - C=35	
418	200W Electronic transformer A=225 - B=55 - C=45	

SIZE (mm)

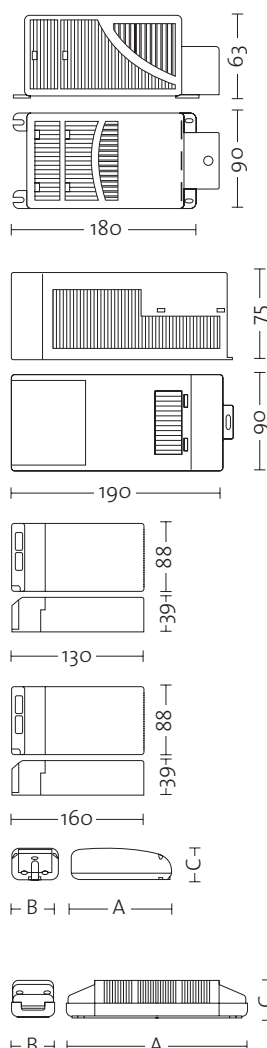

NOTE

18 grey
The optical housing can be adjusted separately on both axes. Luminaires with discharge lamps have a tempered glass louver.