


Adjustable recessed luminaire for discharge lamps.
Separate power supply: 230V - 50Hz.
Ballast not included.

SPINNER


DESIGN - QUATTROBI TECHNICAL DEPARTMENT

CODE	DESCRIPTION	Size (mm)
9030	MT (CDM-T) - 35W - 70W - 150W - G12 Colour: 01 - 18 IP 43 Kg 0.90 Glass louver available on demand Projector equipped with 2 x 18° standard reflector	

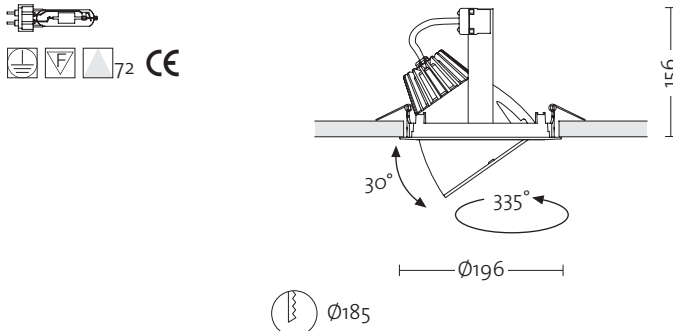



9031	MT (CDM-TC) - 35W - 70W - G8.5 Colour: 01 - 18 IP 43 Kg 0.80 Projector equipped with 2 x 10° standard reflector	
------	---	--

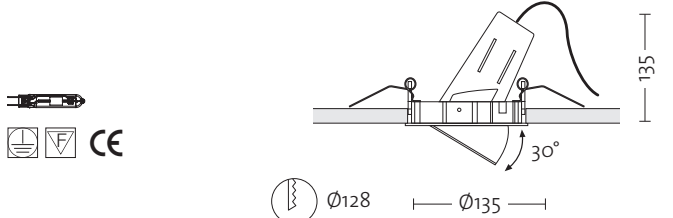



ACCESSORIES FOR CODE 9030

590	Transparent glass louver
591	UV glass louver
592	Glass louver for meat counters
593	Sand-blasted glass louver
930	Reflector 2 x 6°
934	Reflector 2 x 26°
936	Electrical connection kit




590-591-592
593

930-934

936

PHOTOMETRIC CURVES



01 white

18 grey

The optical housing can be adjusted separately on both axes.
With code 9030, a glass louver must always be installed

NOTE