

Star



Recessed Star

Recessed light fitting for 55W compact fluorescent lamps. Different louvers and diffusers to satisfy any requirement.

Materials

Body in white zinc coated steel, provided with accessories for dropceilings (panels with exposed supports). Fixing mm 600x600. Louvre in matt anodized aluminium or reflector in high gloss anodized aluminium. Level opal or prism

diffuser. Fluorescent lamps are not included.


Wiring

Electronic wiring double switch with two electronic ballasts 220/240 50/60Hz, electrical components with ENEC approval for compact fluorescent lamps 55W with 2G11 socket.

Rigid cable H05V2-U section 0,75 mm² (CEI 20-20). Socket terminal 3P+T (section max 2,5mm²).

In accordance with standard IEC 598, CEI EN 60598-1 (CEI 34-21), CEI EN 60598-2-2 (CEI 34-31).

Emergency wiring in accordance with standard CEI EN 60598-2-22 (CEI 34-22).

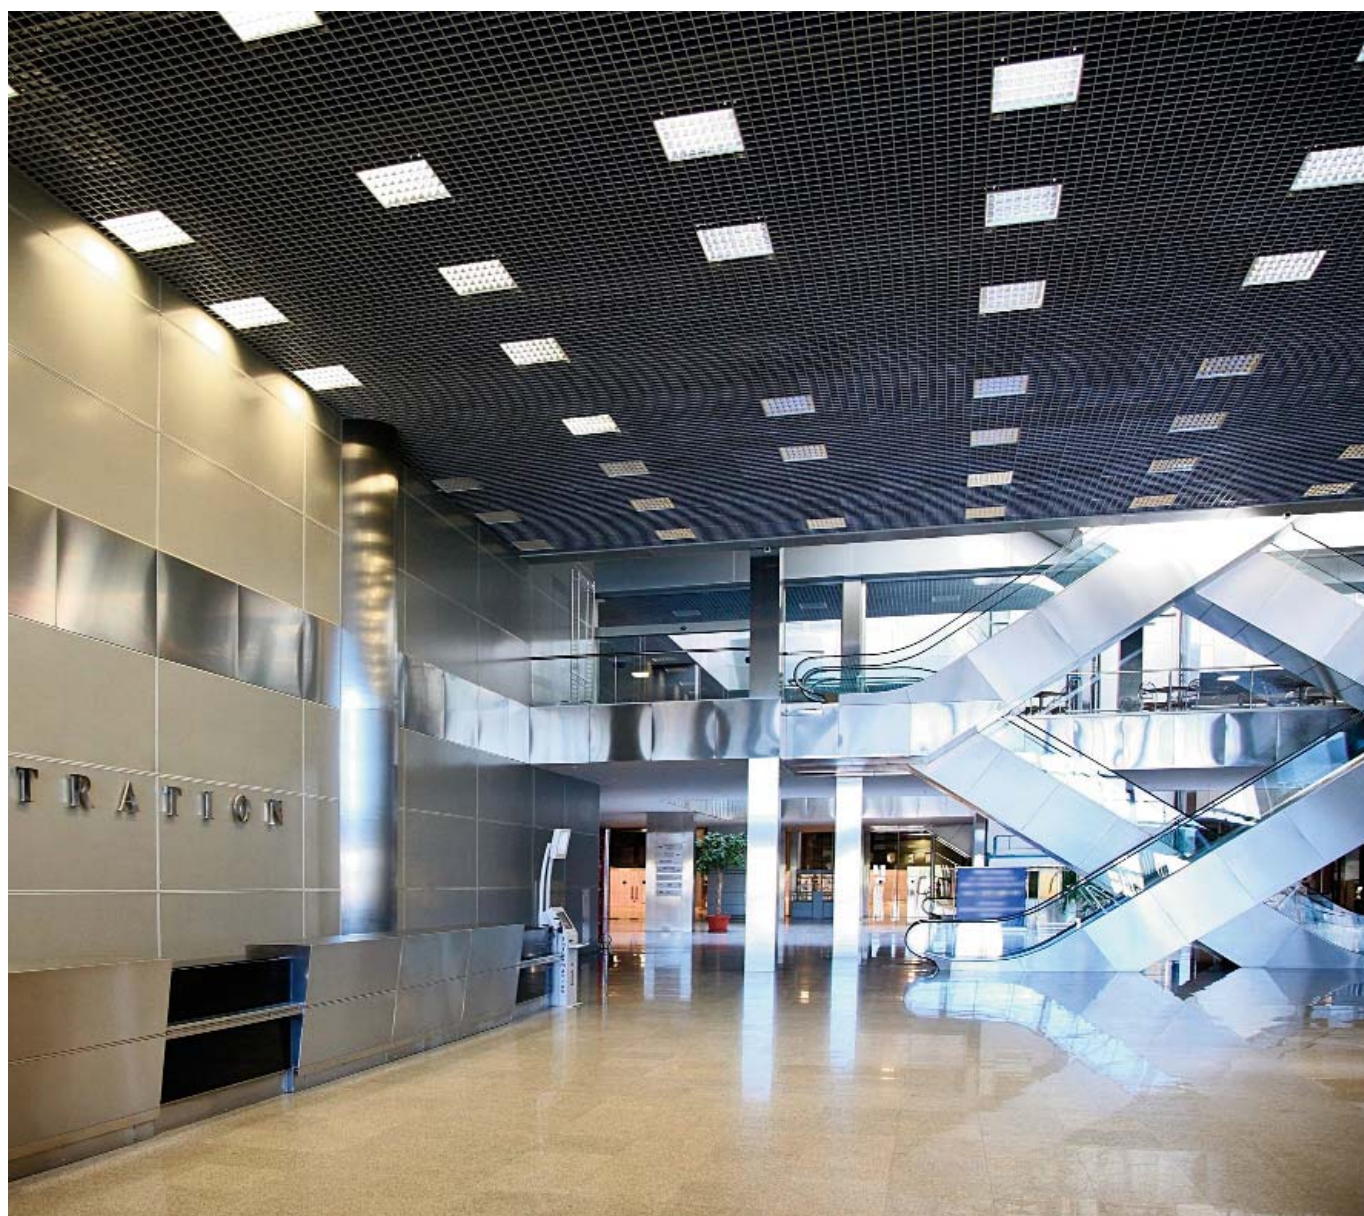



Code	Lamps Watt	matt low luminance louvre
EL6274MT	3x55W	



Code	Lamps Watt	level diffuser
EL6274OP	3x55W	
EL6274PR	3x55W	




pag. 355

Fully recessed light fittings for 3 compact fluorescent lamps direct light.

Louvre in matt aluminium 99,9% anodized (MT) luminance < 500 cd/m² for angles > 65° or level opal diffusers (OP) or prism diffuser (PR). Automatic fixing with security clamps for an easy maintenance

Wiring on request

- EL___/E one lamp emergency continuous light with electronic ballast
- ED___ 220-240V 50-60Hz electronic dimmable ballast
- ED___/E one lamp emergency continuous light with dimmable ballast





Code	Lamps Watt		high gloss reflector
EL6275LU20	4x55	IP20	
EL6275LU40	4x55	IP40	



Code	Lamps Watt		level opal diffuser
EL6275OP	4x55	IP40	



pag. 355

Recessed fixture for 4 compact fluorescent lamps direct light.

Reflector in high gloss anodized aluminium 99,9% (LU). IP20 without screen or IP40 with level transparent diffuser. Also available with level opal diffuser (OP).

Automatic fixing of diffuser with security clamps for an easy maintenance.

Wiring on request

- EL____/E one lamp emergency continuous light with electronic ballast (only for IP20)
- ED____ 220-240V 50-60Hz electronic dimmable ballast (see price list page 4)
- ED____/E one lamp emergency continuous light with dimmable ballast (only for IP20) (see price list page 4)

