


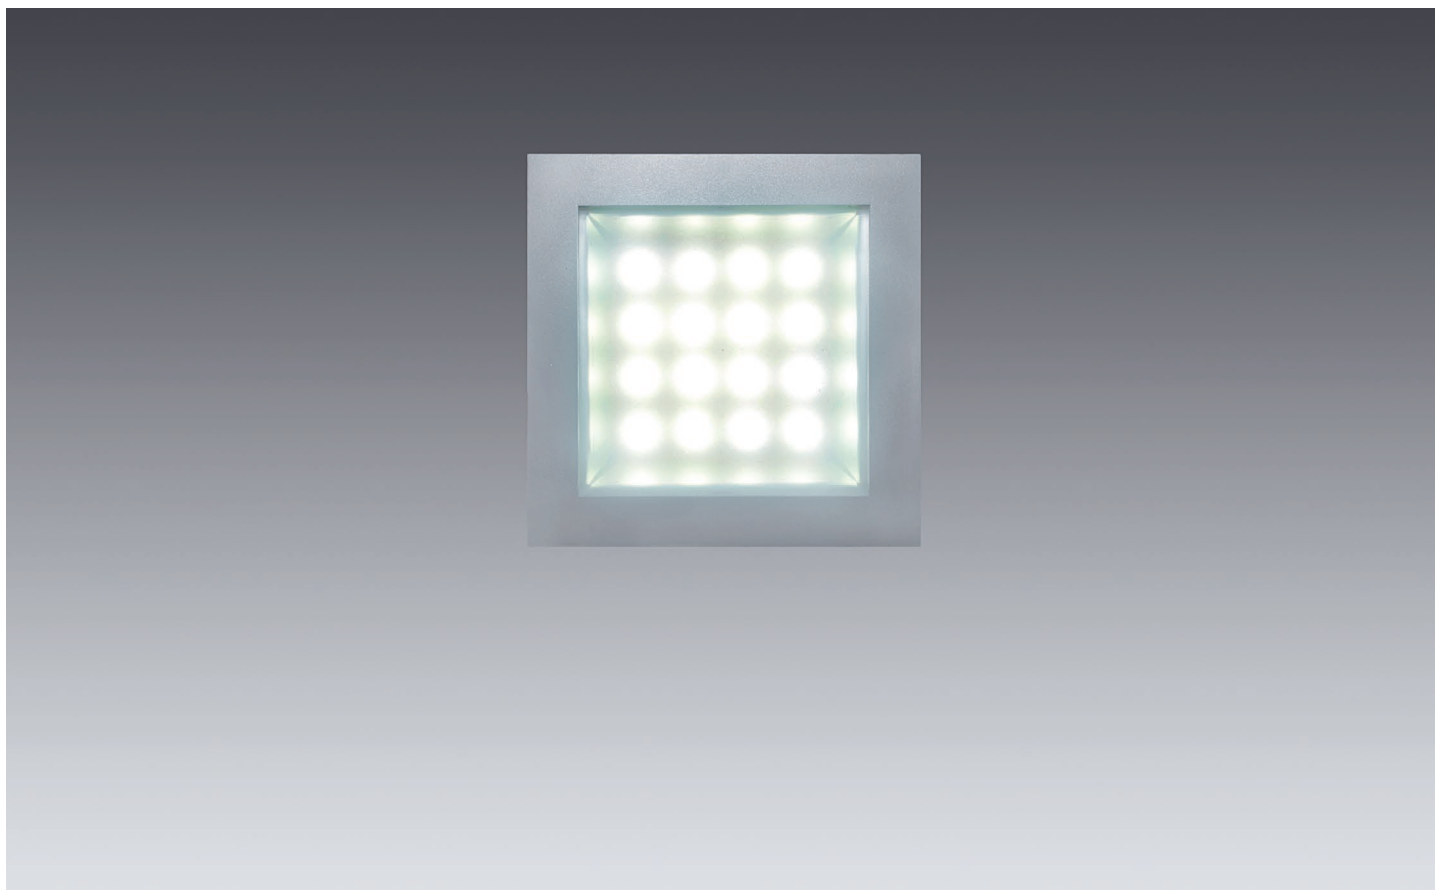

La famiglia Flux si arricchisce del nuovissimo Flux LED.

Flux LED è un apparecchio ad incasso disponibile in 2 modelli, il primo da 16 LED ed il secondo da 24 LED nelle tonalità bianco caldo 3000K e bianco naturale 4000K.

Struttura con cornice di chiusura in alluminio pressofuso, grado di protezione IP43 (IP44 su richiesta), dissipatore in alluminio estruso incluso. Alimentatore a 350 mA fornito di serie con l'apparecchio. Fori per l'incasso identici a quelli esistenti per i modelli Flux 2X18W e 2X26W.

The Flux family is enriched with the brand new Flux LED.

Flux LED is a recessed lighting fitting available in 2 models, the first with 16 LED and the second with 24 LED in warm 3000K and natural 4000K white tones.

The structure has a closing frame in die-cast aluminum and an heat sink in extruded aluminum. Protection degree IP43 (IP44 on request).

350mA driver included in the fitting. Holes to recess the fitting identical to the Flux 2X18W and 2X26W.

La collection Flux offre le nouveau modèle Flux LED. Flux LED est un luminaire d'encastrement disponible en 2 versions: 16 LED et 24 LED teinte blanc chaud 3000K et blanc naturel 4000K. Cadre de fermeture en fonte d'aluminium.

Degré de protection IP43 (IP44 sur demande), dissipateur en aluminium extrudé inclus. Driver 350mA fourni avec l'appareil. Les trous d'encastrement sont les même des modèles Flux 2X18W et 2x26W.




CE IP43

02 JEE.5300.157

16 LEDx1,2W







37 Versione da 165x165 mm, con LED tono bianco naturale 4000K. Driver 350 mA incluso.
Version 165x165 mm, with LED natural white 4000K. Driver 350 mA included.
Version de 165x165 mm, avec LED blanc naturel 4000K. Driver 350 mA inclus.

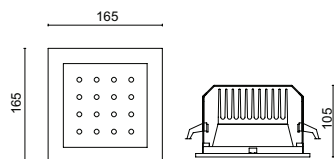

JEE.5300.158

16 LEDx1,2W

Versione da 165x165 mm, con LED tono bianco caldo 3000K. Driver 350 mA incluso.
Version 165x165 mm, with LED warm white 3000K. Driver 350 mA included.
Version de 165x165 mm, avec LED blanc chaud 3000K. Driver 350 mA inclus.




CE IP43

02 JEE.5302.157

24 LEDx1,2W







37 Versione da 225x225 mm, con LED tono bianco naturale 4000K. Driver 350 mA incluso.
Version 225x225 mm, with LED natural white 4000K. Driver 350 mA included.
Version de 225x225 mm, avec LED blanc naturel 4000K. Driver 350 mA inclus.

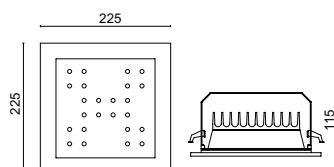

JEE.5302.158

24 LEDx1,2W



Versione da 225x225 mm, con LED tono bianco caldo 3000K. Driver 350 mA incluso.
Version 225x225 mm, with LED warm white 3000K. Driver 350 mA included.
Version de 225x225 mm, avec LED blanc chaud 3000K. Driver 350 mA inclus.



JEE.5300

min. 5mm
max 25mm

150x150 mm

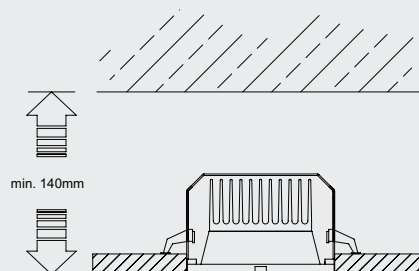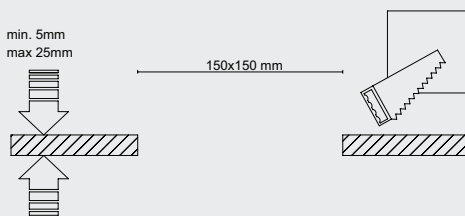

JEE.5302

min. 5mm
max 25mm

205x205 mm

