


Adjustable projector for discharge lamps.
With PF-corrected, electromechanical ballast and tempered glass
front louver.

CODE	DESCRIPTION	
5115 EL	Track-mounted type MD (CDM-TD) - 70W - RX7s 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 IP 40 Kg 4.60	    105 
5115	Track-mounted type MD (CDM-TD) - 70W - RX7s 230V - 50Hz Colour: 01 - 02 - 18 IP 40 Kg 4.60	    105 
5116	Track-mounted type MD (CDM-TD) - 150W - RX7s 230V - 50Hz Colour: 01 - 02 - 18 IP 40 Kg 5.10	    106 
5119	Type with base MD (CDM-TD) - 70W - RX7s 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 IP 40 Kg 4.60	    105 
5119 150	Type with base MD (CDM-TD) - 150W - RX7s 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 IP 40 Kg 4.80	    106 


ACCESSORIES

901 Directional louvers




901


PHOTOMETRIC CURVES

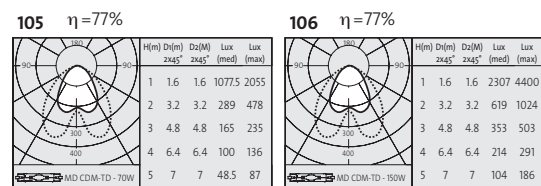

5115 - 5116 - 5115 EL

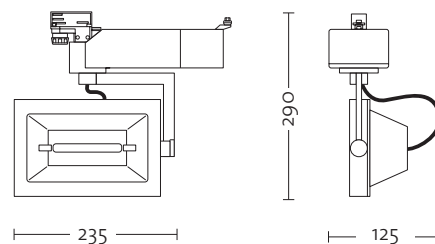

5119 - 5119 - 5119 150

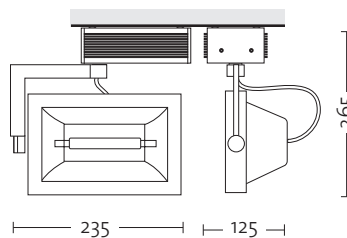

Size (mm)

01 white

02 black

18 grey

NOTE

Adjustable projector for mains voltage halogen lamps.
Complete with tempered glass front louver.

INDY RECTO


E R G O ■ ■ ■ ■

CODE	DESCRIPTION	
5117	Track-mounted type HDG - R7s - 300W max 250V max Colour: 01 - 02 - 18 IP 40 Kg 2.95	   
5118	Type with base HDG - R7s - 300W max 250V max Colour: 01 - 02 - 18 IP 40 Kg 3.30	   




ACCESSORIES

901 Directional louvers




901

5117

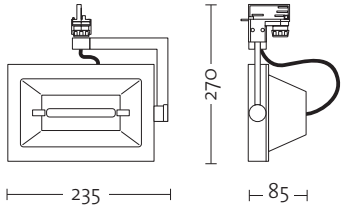

5118

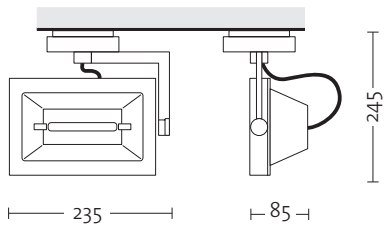

Size (mm)

01 white

02 black

18 grey

NOTE