

Bell



High-Bay

High performance lighting in a modern design. Fluorescent, incandescent, electronic E27 or metal halide lamps in a fixture of easy mounting and easy maintenance.

Materiali

Wiring containing top cover in grey thermoplastic material. Reflector in grey ABS/metacrylate UV resistant, in transparent or glazed novaplex,

UV resistant. IP54 diffuser in transparent polycarbonate with grey rubber ring (included only for fluorescent or incandescent versions). Lamps not included.

Wiring

For compact fluorescent lamps with electronic ballast 220-240V 50/60Hz. For HID lamps: magnetic wiring 230V-50Hz (power factor correction) or with electronic

ballast 220-240V 50/60Hz. For incandescent or energy saving lamps with E27 socket. Electrical components with ENEC approval. Rigid cable H05V2-U section 0,75 mm² (CEI 20-20). Cable suspension: complete with steel cable L=1200 mm, transparent supply cable 3x1,5 mm², terminal socket 2P+T (section max 2,5 mm²),

ceiling cap, steel cylinder and wirelock clamp for millimeter adjustment. In accordance with standard: IEC 598, CEI EN 60598-1 (CEI 34-21). Emergency wiring in accordance with standard CEI EN 60598-2-22 (CEI 34-22).



Bell

EL39011SA



Code	Lamps Watt	C mm	H mm	
EL390157 GR•T•SA	1x57	420	455	FSM Gx24q5
EL3901 GR•T•SA	1x26/42	420	455	FSQ G24q3
EL390357 GR•T•SA	2x57	420	455	FSM Gx24q5
EL3903 GR•T•SA	2x26/42	420	455	FSQ G24q3
EL3911 GR•T•SA	1x26/42	360	400	FSQ G24q3

Code	C mm
A390	420
A391	360

IP43 Diffuser:
transparent polycarbonate complete with anti-dust in grey rubber.



A390
A391




pag. 348-349

Pendant decorative High-Bay for fluorescent lamps.

Wiring on request

- EL ___ /E one lamp emergency continuous light with electronic ballast (2x57W not included)
- ED ___ 220-240V 50-60Hz electronic dimmable ballast (see price list page 4) (2x57W not included)
- ___ BIN with adapter for Novatrack

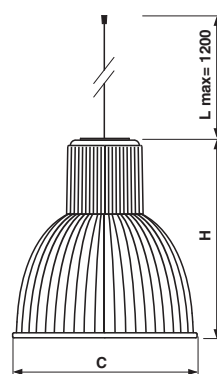

Colours

- GR
- T
- SA

Bell

A3917GR



Code	Lamps Watt	C mm	H mm	
A3905 GR•T•SA	1x70	420	455	MC E27
A3907 GR•T•SA	1x70	420	455	
A3915 GR•T•SA	1x70	360	400	MT G12
A3917 GR•T•SA	1x35	360	400	



Schermo di protezione IP43 incluso




pag. 349-350

Pendant decorative High-Bay for M.H. lamp.

Wiring on request

EL_____ 220-240V 50-60Hz electronic ballast
 _____BIN with adapter for Novatrack

Colours

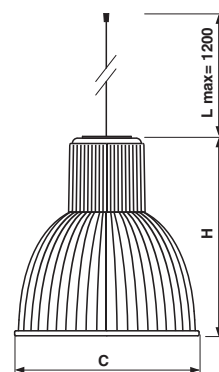

Bell

EL3919SA



Code	Lamps Watt	C mm	H mm
A3921 GR•T•SA	1x100	420	455
A3919 GR•T•SA	1x75	360	400



Code	C mm
A390	420
A391	360

IP43 Diffuser:
transparent polycarbonate complete with anti-dust in grey rubber.

A390
A391



pag. 350

Pendant decorative High-bay for E27 incandescent or energy saving lamps.

Wiring on request

____ BIN with adapter for Novatrack

Colours

