

easy-light

lighting system designed for those environments, wherein a prolonged use of artificial light is required. Attractive design and small sizes make it integral part of the environment.

Fitted for fluorescent T5 lamps (electronic only) that allow to achieve several benefits in terms of comfort, safety and energy saving.

Applications in various configurations: single-lamp ceiling mounted, wall mounted, suspended or track mounted for direct/indirect lighting; double-lamp ceiling mounted, wall mounted, suspended or track mounted for direct, indirect or direct/indirect lighting.

Body made of zinc coated sheet steel, prefinished in white or grey colour. Reflector made of polished mirrored 99,9% aluminium.

End caps made of self-extinguishing V2 polycarbonate.

Completion screens made of self-extinguishing V2 polycarbonate, available with lined transparent finish, or crystal-effect lamellar, opal or dark metallic screens.



fluo fluo fluo fluo fluo fluo fluo



Single-lamp fixture, suspended or ceiling or track mounted, for direct lighting
Screens to be ordered separately

Code	W	L (mm)	completion screen
*E205K1024BK-GK	1x14/24	607	n.1 A1008 + n.1 A1009 / n.1 A1006
*E205K1054BK-GK	1x28/54	1207	n.4 A1008 / n.1 A1005
*E205K1080BK-GK	1x35/49/80	1494	n.5 A1008 / n.1 A1004



B ☐
G ☐




Single-lamp fixture, wall mounted, for direct or indirect lighting
Screens to be ordered separately

Code	W	L (mm)	completion screen
*E206K1024BK-GK	1x14/24	625	n.1 A1008 + n.1 A1009 / n.1 A1006
*E206K1054BK-GK	1x28/54	1225	n.4 A1008 / n.1 A1005
*E206K1049BK-GK	1x35/49	1512	n.5 A1008 / n.1 A1004



B ☐
G ☐



Single-lamp fixture with single-switch wiring, suspended or ceiling or wall or track mounted, for direct or indirect lighting

Screens to be ordered separately

Available with double-switch wiring

Code	W	L (mm)	completion screen
*E206K2024BK-GK	2x14/24	625	n.2 A1008 + n.2 A1009 / n.2 A1006
*E206K2054BK-GK	2x28/54	1225	n.8 A1008 / n.2 A1005
*E206K2049BK-GK	2x35/49	1512	n.10 A1008 / n.2 A1004





B 

G 



EEI=A2

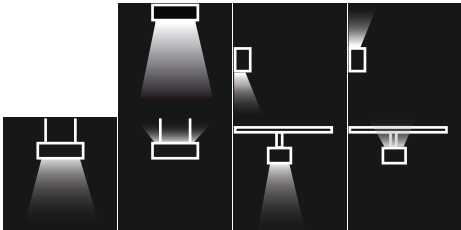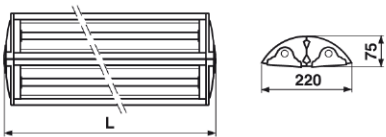

Double-lamp fixture single-switch wiring, suspended or wall or track mounted, for direct/indirect lighting

Screens to be ordered separately

Code	W	L (mm)	completion screen
*E206M2024BK-GK	2x14/24	625	n.1 A1008 + n.1 A1009 / n.2 A1006
*E206M2054BK-GK	2x28/54	1225	n.4 A1008 + n.1 A1005 / n.2 A1005
*E206M2049BK-GK	2x35/49	1512	n.5 A1008 + n.1 A1004 / n.2 A1004




B 

G 



EEI=A2

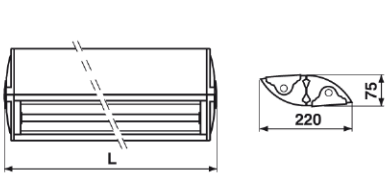

Double-switch wiring


F206M2024BK-GK	2x14/24	625	n.1 A1008 + n.1 A1009 / n.2 A1006
F206M2054BK-GK	2x28/54	1225	n.4 A1008 + n.1 A1005 / n.2 A1005
F206M2049BK-GK	2x35/49	1512	n.5 A1008 + n.1 A1004 / n.2 A1004

Closed screen
made of self-extinguishing V2 polycarbonate

Code	H (mm)	L (mm)	for fixtures
A1006	80	548	14/24W
A1005	80	1148	28/54W
A1004	80	1435	35/49W



IP20




Opal lamellar screen
made of self-extinguishing V2 polycarbonate

Code	H (mm)	L (mm)
A1009 O	80	256
A1008 O	80	286



IP20




Crystal-effect lamellar screen
made of self-extinguishing V2 polycarbonate, with sectional modules

Code	H (mm)	L (mm)
A1009 C	80	256
A1008 C	80	286



IP20




Dark light metallic lamellar screen
made of self-extinguishing V2 polycarbonate, with luminance < 200cd/ m2 for angles > 65°
(European standard EN 12464-1) with sectional modules

Code	H (mm)	L (mm)
A1009 M	80	256
A1008 M	80	286




IP20




Empty module (without wiring) type single-lamp
suspended or ceiling mounted

Code	L (mm)
A1075 BI-GR	607
A1073 BI-GR	1207
A1071 BI-GR	1494




Empty module (without wiring) type single-lamp
wall mounted

Code	L (mm)
A1035 BI-GR	625
A1033 BI-GR	1225
A1031 BI-GR	1512



Empty module (without wiring) type double-lamp
direct lighting or indirect lighting

Code	L (mm)
A1135 BI-GR	625
A1133 BI-GR	1225
A1131 BI-GR	1512

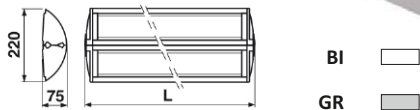

Empty module (without wiring) type double-lamp
direct/indirect lighting


Code	L (mm)
A1235 BI-GR	625
A1233 BI-GR	1225
A1231 BI-GR	1512






Suspension kit for single and double-lamp fixtures.

Code	L (mm)
A1040	1200
A1040/M3	3000



Suspension kit for single and double-lamp fixtures.

Code	L (mm)
A1000	1200
A1000/M3	3000



Power supply kit for single and double-lamp fixtures

Code	L (mm)	power supply cord
A1001	1200	3x1,5
A1001 2A	1200	4x1,5
A1001/M3	3000	3x1,5
A1001/M3 2A	3000	4x1,5



Power supply for single and double-lamp fixtures

Code	L (mm)	power supply cable	cable colour
A1041	1200	3x1,5	transparent
A1041 2A	1200	4x1,5	transparent
A1041 3A	1200	5x1,5	transparent
A1041/M3	3000	3x1,5	transparent
A1041/M3 2A	3000	4x1,5	transparent
A1041/M3 3A	3000	5x1,5	transparent

rich. GR



Available on demand with grey canopy (ex. **A1041 GR**)




Brackets for ceiling mounting for double-lamp fixtures.

Code
A1002

Carter to finish the linear joints

Code
A104 BI-GR

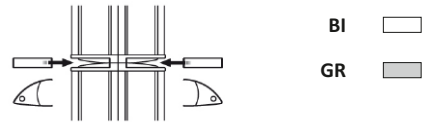


Polycarbonate accessories to finish the corner
for L- or T- configurations of single and double-lamp fixtures

Code
A105 BI-GR



Adjustable corner
for single and double-lamp fixtures

Code
A108 BI-GR

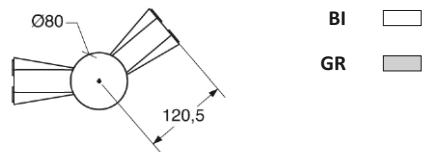

Shelf for wall mounting
made of polycarbonate, for double-lamp fixtures

Code
A110 BI-GR

