



Silver



"Silver" system

Modular system for T5 fluorescent lamps, and halogen QR111, ceiling or suspended mounting. It can be installed as modular system or as single point of illumination. This range includes both diffusers IP40 degree of protection and low luminance louvers. Low luminance louvers are in accordance with the new European standard EN12464-1. The combination of fluorescent and halogen lamps makes "Silver"

range particularly suitable for the lighting of commercial spaces.

Materials

Body in zinc coated steel. White or grey. Base in white zinc coated steel. Ending parts ABS same colour of the body. Low luminance louver in aluminium or opal diffuser. Included accessories: for continuous line mounting. Fluorescent lamps are not included.

Wiring

Wiring for fluorescent T5 lamps with electronic ballast 220-240V 50-60Hz, with electrical components with ENEC approval. Wiring for halogen QR111 lamps with electronic transformer 240V 50Hz. Rigid cable H05V2-U section 0,75 mm² (CEI 20-20). Socket terminal 2P+T (section max 2,5 mm²) on both sides with phase and neutral line connected with coloured cables H05V2-U,


section 1,5 mm².

Wiring on request with dimmable ballast and/or with emergency light. In accordance with standard IEC 598, CEI EN 60598-1 (CEI 34-21). Emergency wiring in accordance with standard CEI EN 60598-2-22 (CEI 34-22).

Silver



EL1511LUGR

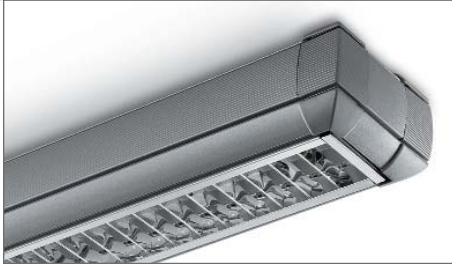

Code	Lamps Watt	L mm	high gloss low luminance louvre
EL1511 LUBI•GR	1x35	1527	
EL1521 LUBI•GR	1x49	1527	
EL1522 LUBI•GR	1x80	1527	
EL1513 LUBI•GR	1x28	1227	
EL1523 LUBI•GR	1x54	1227	
EL1515 LUBI•GR	1x14	627	
EL1525 LUBI•GR	1x24	627	

Code	Lamps Watt	L mm	matt low luminance louvre
EL1511 MTBI•GR	1x35	1527	
EL1521 MTBI•GR	1x49	1527	
EL1522 MTBI•GR	1x80	1527	
EL1513 MTBI•GR	1x28	1227	
EL1523 MTBI•GR	1x54	1227	
EL1515 MTBI•GR	1x14	627	
EL1525 MTBI•GR	1x24	627	





pag. 332

Single lamp light fittings direct light for T5 lamps, gloss (LU) or matt (MT) low luminance louvre.

Louvre: low luminance high gloss or matt louvre in aluminium 99,9% anodized with transverse parabolic blades completely closed in the upper part. Very high performance, antiridescence, luminance <200 cd/m² for angles >65° transversal and longitudinal (EN 12464-1).

Wiring on request

- EL____/E one lamp emergency continuous light with electronic ballast (not included 1x14W and 1x24W)
- ED____ 220-240V 50-60Hz electronic dimmable ballast (see price list page 4)
- ED____/E one lamp emergency continuous light with dimmable ballast (see price list page 4) (not included 1x14W and 1x24W)



Colours



Silver

EL1511SOBI



Code	Lamps Watt	L mm
EL1511SOBI•GR	1x35	1527
EL1521SOBI•GR	1x49	1527
EL1522SOBI•GR	1x80	1527
EL1513SOBI•GR	1x28	1227
EL1523SOBI•GR	1x54	1227
EL1515SOBI•GR	1x14	627
EL1525SOBI•GR	1x24	627




pag. 332

Single lamp light fittings direct light for
T5 lamps with closed opal diffuser.

Closed polycarbonate opal diffuser.

Wiring on request

- EL___/E one lamp emergency continuous
light with electronic ballast
(not included 1x14W and 1x24W)
- ED___ 220-240V 50-60Hz electronic
dimmable ballast
(see price list page 4)
- ED___/E one lamp emergency continuous
light with dimmable ballast
(see price list page 4)
(not included 1x14W and 1x24W)



Colours



EL1611LUBI



Code	Lamps Watt	L mm	high gloss low luminance louvre
EL1611LUBI•GR	2x35	1527	
EL1621LUBI•GR	2x49	1527	
EL1622LUBI•GR	2x80	1527	
EL1613LUBI•GR	2x28	1227	
EL1623LUBI•GR	2x54	1227	
EL1615LUBI•GR	2x14	627	
EL1625LUBI•GR	2x24	627	

Code	Lamps Watt	L mm	matt low luminance louvre
EL1611MTBI•GR	2x35	1527	
EL1621MTBI•GR	2x49	1527	
EL1622MTBI•GR	2x80	1527	
EL1613MTBI•GR	2x28	1227	
EL1623MTBI•GR	2x54	1227	
EL1615MTBI•GR	2x14	627	
EL1625MTBI•GR	2x24	627	





pag. 332-333

Double lamp light fittings direct light for T5 lamps, gloss (LU) or matt (MT) low luminance louvre.

Louvre: low luminance high gloss or matt louvre in aluminium 99,9% anodized with transverse parabolic blades completely closed in the upper part. Very high performance, antiridescant, luminance <200 cd/m² for angles >65° transversal and longitudinal (EN 12464-1).

Wiring on request

- EL___/E one lamp emergency continuous light with electronic ballast
- EL___ 2A wiring with 2 electronic ballast for double switch
- EL_/E_ 2A one lamp emergency continuous light with 2 electronic ballast for double switch (escluse 2x14W e 2x24W)
- ED_____ 220-240V 50-60Hz electronic dimmable ballast (see price list page 4)
- ED___/E one lamp emergency continuous light with dimmable ballast (see price list page 4) (not included 1x14W and 1x24W)



Colours



EL1611LUBI/I



direct/indirect light



Code	Lamps Watt	L mm	high gloss low luminance louvre
EL1611LUBI•GR/I	2x35	1527	
EL1621LUBI•GR/I	2x49	1527	
EL1622LUBI•GR/I	2x80	1527	
EL1613LUBI•GR/I	2x28	1227	
EL1623LUBI•GR/I	2x54	1227	
EL1615LUBI•GR/I	2x14	627	
EL1625LUBI•GR/I	2x24	627	

Code	Lamps Watt	L mm	matt low luminance louvre
EL1611MTBI•GR/I	2x35	1527	
EL1621MTBI•GR/I	2x49	1527	
EL1622MTBI•GR/I	2x80	1527	
EL1613MTBI•GR/I	2x28	1227	
EL1623MTBI•GR/I	2x54	1227	
EL1615MTBI•GR/I	2x14	627	
EL1625MTBI•GR/I	2x24	627	





pag. 333

Double lamp light fittings
direct/indirect light for T5 lamps, gloss (LU) or matt (MT) low luminance louvre.

Louvre: low luminance high gloss or matt louvre in aluminium 99,9% anodized with transverse parabolic blades completely closed in the upper part. Very high performance, antiridescant, luminance <200 cd/m² for angles >65° transversal and longitudinal (EN 12464-1).

Wiring on request

- EL___/E one lamp emergency continuous light with electronic ballast
- EL___ 2A wiring with 2 electronic ballast for double switch
- EL_/E_ 2A one lamp emergency continuous light with 2 electronic ballast for double switch (escluse 2x14W e 2x24W)
- ED_____ 220-240V 50-60Hz electronic dimmable ballast (see price list page 4)
- ED___/E one lamp emergency continuous light with dimmable ballast (see price list page 4) (not included 1x14W and 1x24W)



Colours



Silver

EL1611 SOGR



Code	Lamps Watt	L mm	closed opal diffuser
EL1611 SOBI•GR	2x35	1527	
EL1621 SOBI•GR	2x49	1527	
EL1622 SOBI•GR	2x80	1527	
EL1613 SOBI•GR	2x28	1227	
EL1623 SOBI•GR	2x54	1227	
EL1615 SOBI•GR	2x14	627	
EL1625 SOBI•GR	2x24	627	




pag. 333

Double lamp light fittings
direct light for T5 lamps with
closed opal diffuser.

Closed polycarbonate opal
diffuser.

Wiring on request

- EL___ /E one lamp emergency continuous
light with electronic ballast
- EL___ 2A wiring with 2 electronic ballast for
double switch
- EL_ /E_ 2A one lamp emergency continuous light
with 2 electronic ballast for double switch
(escluse 2x14W e 2x24W)
- ED___ 220-240V 50-60Hz electronic
dimnable ballast (see price list page 4)
- ED___ /E one lamp emergency continuous
light with dimmable ballast
(see price list page 4)
(not included 1x14W and 1x24W)



Colours

BI

GR

EL1611SOGRI



direct/indirect light



Code	Lamps Watt	L mm
EL1611 SOBI•GR /I	2x35	1527
EL1621 SOBI•GR /I	2x49	1527
EL1622 SOBI•GR /I	2x80	1527
EL1613 SOBI•GR /I	2x28	1227
EL1623 SOBI•GR /I	2x54	1227
EL1615 SOBI•GR /I	2x14	627
EL1625 SOBI•GR /I	2x24	627




pag. 334

Double lamp light fittings
direct/indirect light for T5
lamps with closed opal diffu-
ser.

Closed polycarbonate opal
diffuser.

Wiring on request

- EL___ /E one lamp emergency continuous
light with electronic ballast
- EL___ 2A wiring with 2 electronic ballast for
double switch
- EL_ /E_ 2A one lamp emergency continuous light
with 2 electronic ballast for double switch
(esclude 2x14W e 2x24W)
- ED___ 220-240V 50-60Hz electronic
dimmable ballast (see price list page 4)
- ED___ /E one lamp emergency continuous
light with dimmable ballast
(see price list page 4)
(not included 1x14W and 1x24W)



Colours

- BI
- GR


EDD1651SOG




Code	Lamps Watt	L mm
EDD1651SOBI•GR	3x35	1527
EDD1663SOBI•GR	3x54	1227



RGB light fitting for T5
fluorescent lamps with
DALI/DSI ballasts, provided
with closed polycarbonate
opal diffuser.

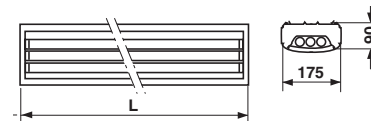

Colours



Silver



Silver

EL1645GR



Code	Lamps Watt	L mm
EL1645BI•GR	max 3x75	627

EL1646GR



Code	Lamps Watt	L mm
EL1646BI•GR	max 2x75	433

EL1647GR




Code	Lamps Watt	L mm
EL1647BI•GR	max 1x75	175



Light fitting orientable light for 12V
QR111 halogen lamp. Max inclination:
70°.


N.B. Lamps not included

Wiring cover in black polycarbonate.
Wiring with electronic transformer 240V
50Hz, with electrical components with
ENEC approval. Rigid cable H05V2-U
section 0,75 mm² (CEI 20-20). Socket
terminal 2P+T (section max 2,5 mm²).




Colours



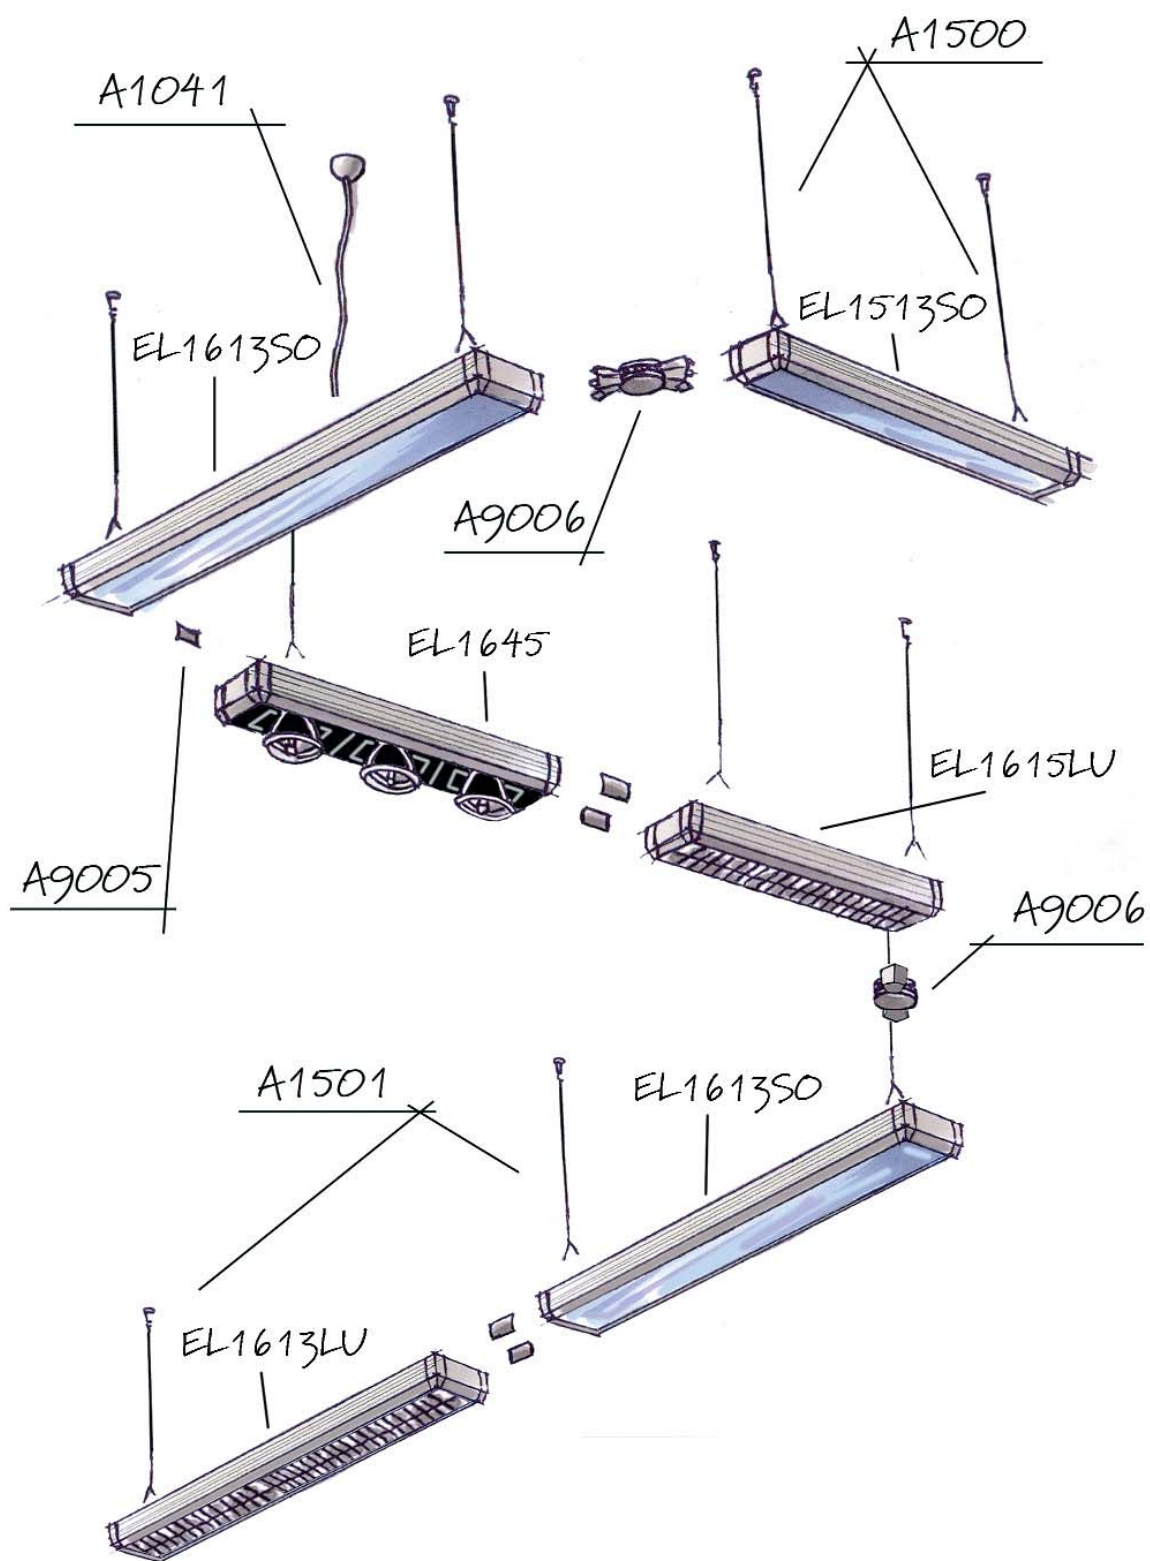

Silver

A1531GR

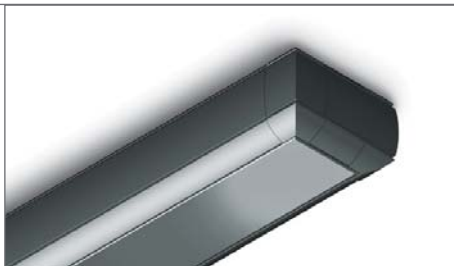

Code	A mm	L mm
A1531BI•GR	121	1527
A1533BI•GR	121	1227
A1535BI•GR	121	627


A1631GR



Code	A mm	L mm
A1631BI•GR	175	1527
A1633BI•GR	175	1227
A1635BI•GR	175	627
A1637BI•GR	175	175





Empty module.

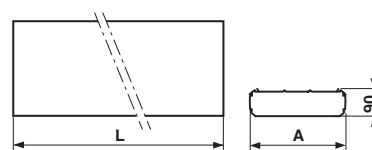



Colours



Silver Accessories

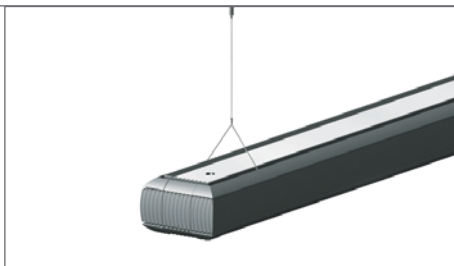

Code	L mm
A1500	1200
A1500/M3	3000
Suspension for one lamp light fittings. 2 steel cables.	

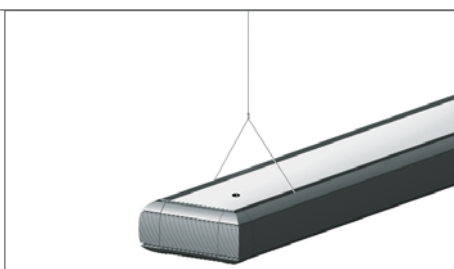


Code	L mm
A1501	1200
A1501/M3	3000
Suspension for two lamp light fittings. 2 steel cables.	




Colours
☐
 GR ☒



Code	L mm	Alim. cable
A1041	1200	3x1,5
A1041 2A	1200	4x1,5
A1041 3A	1200	5x1,5
A1041/M3	3000	3x1,5
A1041/M3 2A	3000	4x1,5
A1041/M3 3A	3000	5x1,5
Cable suspension for single and double-lamp. Complete set of accessories for power supply: 1 bracket; 1 transparent power cord with clamp; 1 white ABS ceiling wire cover rosette (grey GR on request).		

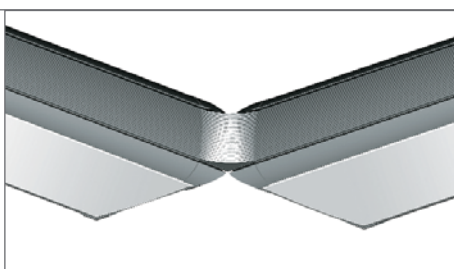

Colours
 BI ☐
 GR ☒



Code
A9005BI•GR
Joint. 90° angular joint.



Colours
 BI ☐
 GR ☒

Code
A9006 BI•GR
Joint. Circular angular joint.



Silver



Silver

